



# Machine Vision

Datalogic Automation Machine Vision at a glance .....	4
Automotive .....	6
Electronics .....	8
Packaging .....	10
Medical & Pharma .....	12
General Manufacturing .....	14
Impact software: VPM and CPM .....	16
Tools and Controls .....	18
Machine vision basic principles .....	20
Vision sensors .....	24
Smart cameras .....	26
Embedded systems .....	28
Digital cameras .....	30
Accessories .....	32
Training and Support .....	33



# MACHINE VISION

The Machine Vision Business Unit of Datalogic Industrial Automation is built upon the acquisition of PPT Vision Inc. in 2011. For over 30 years, PPT Vision has focused exclusively on the development of machine vision technology for in-line automated inspection and factory automation. Thanks to its extensive experience of thousands of successful machine vision installations throughout the world, PPT has become a recognized world leader in machine vision innovation and has brought unique benefits to customers:

- **A single machine vision software platform** - Programming software that is flexible, powerful, and common to all smart cameras and embedded vision system products. This means no operator cross-training and no need to maintain different software platforms— just select the hardware you want and go! Transfer inspection programs from one camera to another and back again without redeveloping the application.
- **Flexibility and Security** – Control Panel Manager (CPM) - a control panel software that is not only secure, but field-configurable and common to all products. Protect your inspection and system configuration from unauthorized users, but allow qualified personnel as much flexibility as they need. CPM provides ultimate flexibility when compared to complicated software programming languages and allows you to create control panels in a mere fraction of the time. Connect and view data from one or many vision systems with just a click of a button.
- **Time-to-market** - Personalized, technically superior and committed customer support. We can provide you with as much support as you need when it comes to delivering application solutions. Choose one of our highly skilled and qualified application engineers or training specialists, or select a certified partner to guide you from application concept to installation and qualification of your system.
- **Large product portfolio** - Hardware platforms that allow our customers to expand their range of applications. From the simplest vision sensors to the highest performance embedded processors, we can deliver a vision system optimized for your inspection needs. Choose a smart camera in an inline or right angle version, color or greyscale sensor, CCD or CMOS sensor; it does not matter because we have you covered. For embedded systems, select from a single to multi-headed area scan or line scan cameras that range from VGA to ultra-high resolution images.

Today, after completion of the integration process between Datalogic Industrial Automation and PPT Vision Inc., the combined product lines of the two companies encompasses both hardware and software while covering a wide range of performance and price point requirements. Selling through a global network of experienced distributor and integration partners, Datalogic Automation is the complete solution provider for all your machine vision needs.

## TECHNOLOGY TIMELINE

Founded as Pattern Processing Technologies	1982
Vision Process Controller (VPC) Product Released	1991
PPT Vision releases the Passport Scout Product Lineup	1994
DSL Vision System Introduced – World's First Full Digital Vision System	1997
PPT 861 3D Product released for Semiconductor Business	2001
IMPACT Software Suite Released (Vision Program Manager & Control Panel Manager)	2002
OCR Software Released	2003
Datalogic SCS1 Smart Camera Introduced	2005
Datalogic DataVS Vision Sensor introduced	2007
New Improved Pattern Finding Software Released	2010
PPT Vision Inc. becomes the Machine Vision BU of Datalogic Industrial Automation	2012





1984	APP 200 Series Vision System Introduced
1991	Vision Program Manager (Classic) Software Released
1997	PPT Acquires 3D Scanning Moiré Interferometry (SMI) Technology
2000	Microelectronics Product Group (MPG) Developed
2002	IMPACT C – Series Tethered Smart Camera Product Introduced
2003	Integrates CameraLink into C-Series Processor
2004	IMPACT T – Series Inline Smart Camera Introduced
2006	IMPACT A – Series Right Angle Smart Camera Introduced
2010	MX40 Multi camera embedded processor Introduced
2011	PPT Vision acquired by Datalogic

## TECHNOLOGY TIMELINE

### MACHINE VISION PRODUCT GROUPS:

- **Vision Sensors**
- **Smart Cameras**
- **Embedded Systems**
- **Machine Vision Software**

Our complete family of high-performance smart cameras and embedded machine vision systems utilize the same software across all products. The hardware consists of vision sensors, smart cameras, and embedded vision systems. These products are specifically designed and developed by our engineers to meet all your manufacturing inspection requirements and to get your application up and running faster than anyone else in the industry – Guaranteed!

### INNOVATION

Through continuous development and refinement, our product line is the most complete hardware and software solution available on the market today.


### EXPERIENCE

With 30 years in the machine vision business and thousands of successful customer installations, our organization and your partners are able to solve the most challenging inspection applications within a wide variety of markets and manufacturing settings.


### RESPONSIVENESS

Together with our global distribution and integration partners, pride our self on providing a level of training and support that is unmatched in the industry. We listen, then execute – turning our customers' requirements into solutions faster than anyone else.



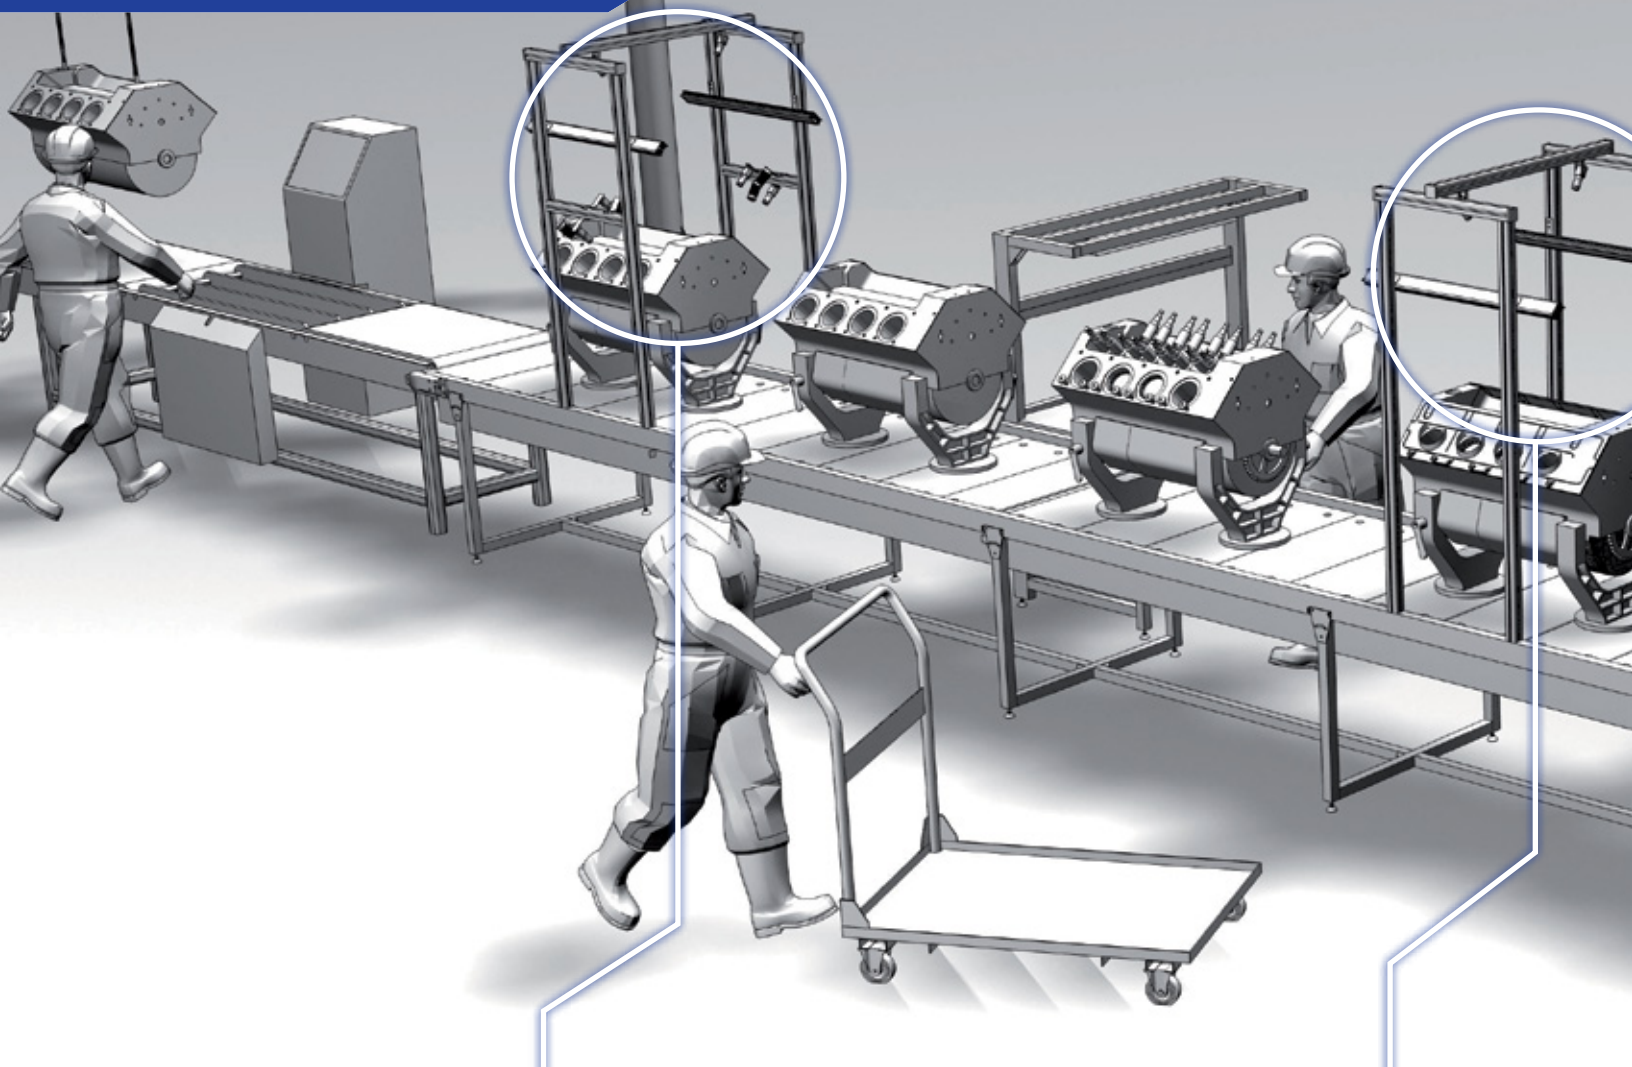


## Engine Block Verification


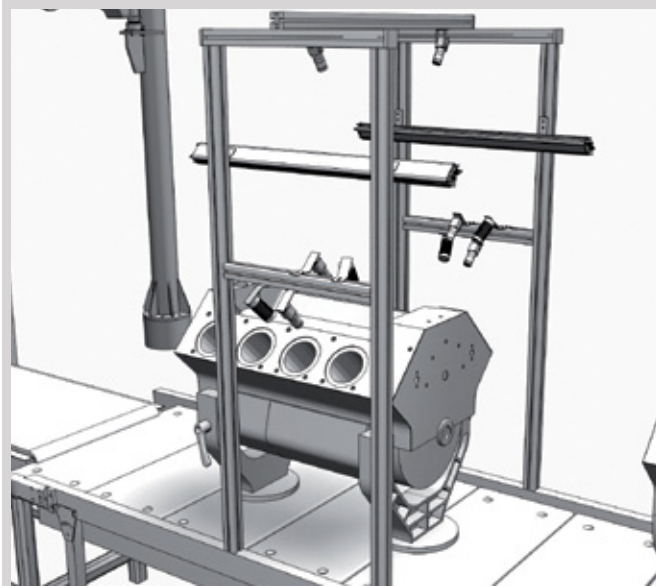


Allows manufacturers to verify and quantify the proper placement and size of critical bolt hole locations as well as to identify if secondary processes, such as thread tapping or surface machining, have been successfully completed. This type of early inspection prevents the manufacturer from adding more cost to defective materials or allows for the identification of flawed high value parts that can be reworked.

## Epoxy Bead Verification

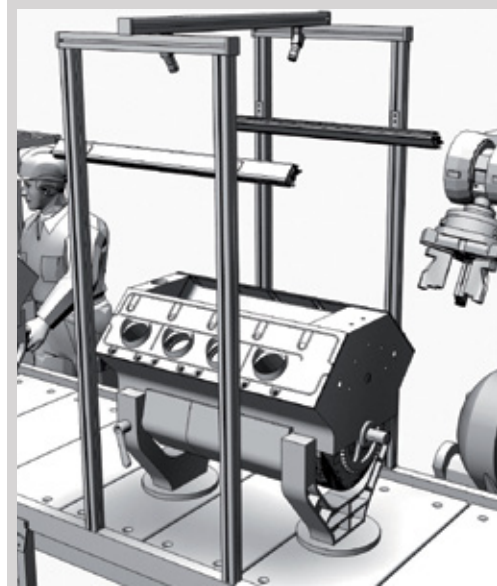




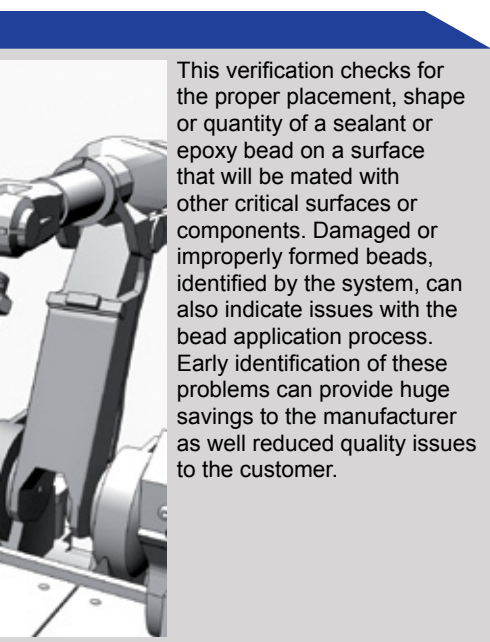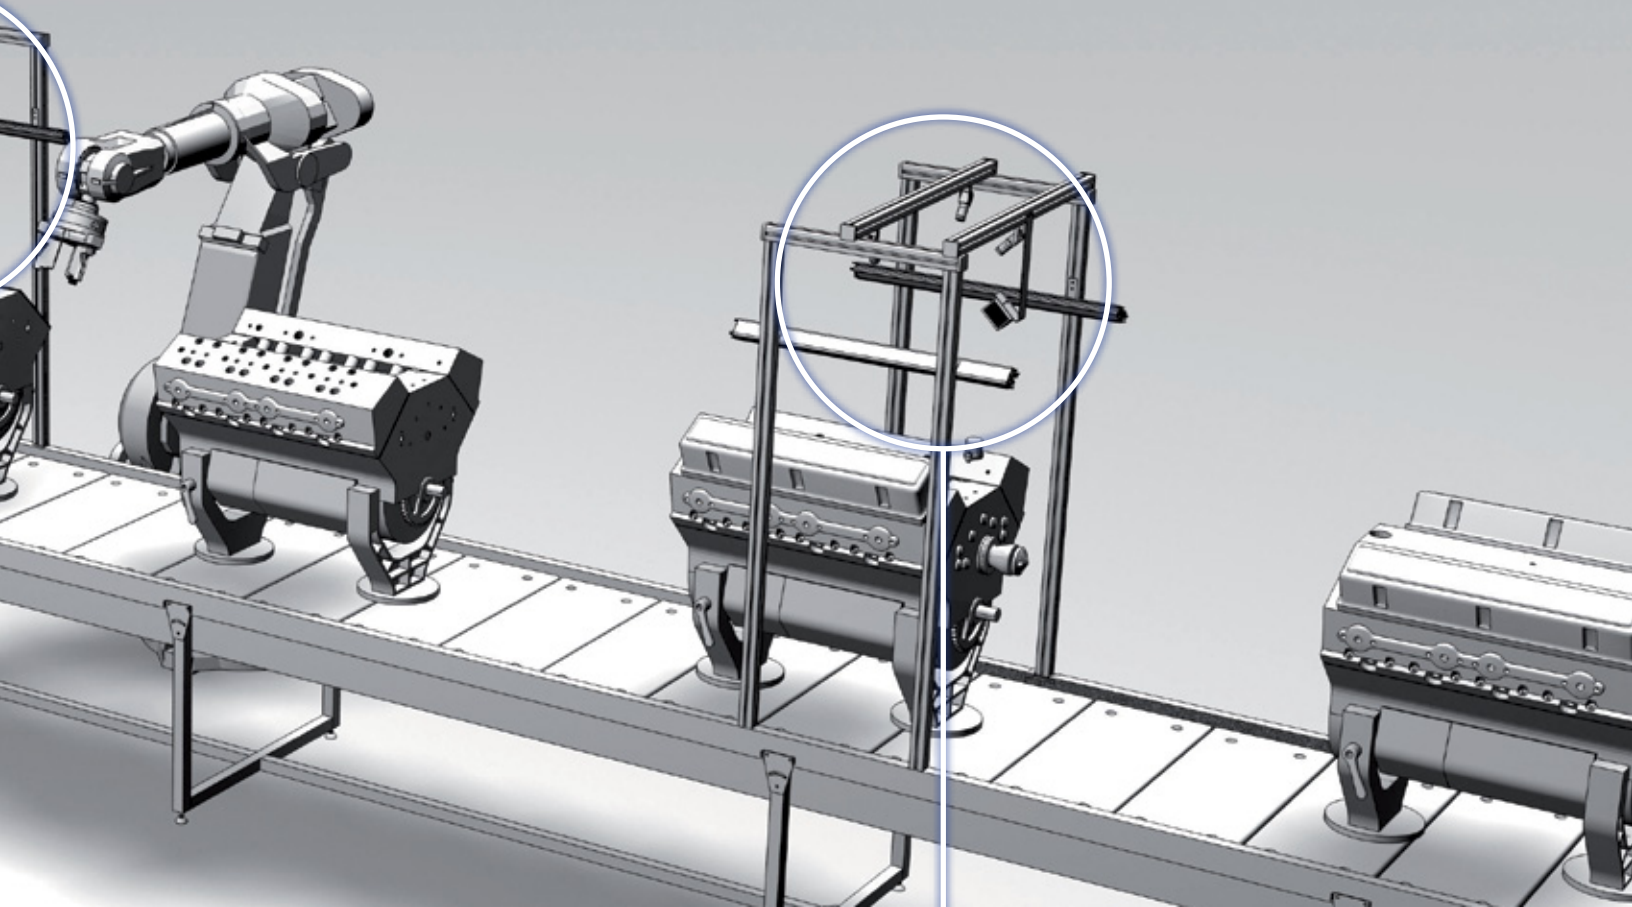


This verification checks for the proper placement, shape or quantity of a sealant or epoxy bead on a surface that will be mated with other critical surfaces or components. Damaged or improperly formed beads, identified by the system, can also indicate issues with the bead application process. Early identification of these problems can provide huge savings to the manufacturer as well reduced quality issues to the customer.


### Component Presence / Position

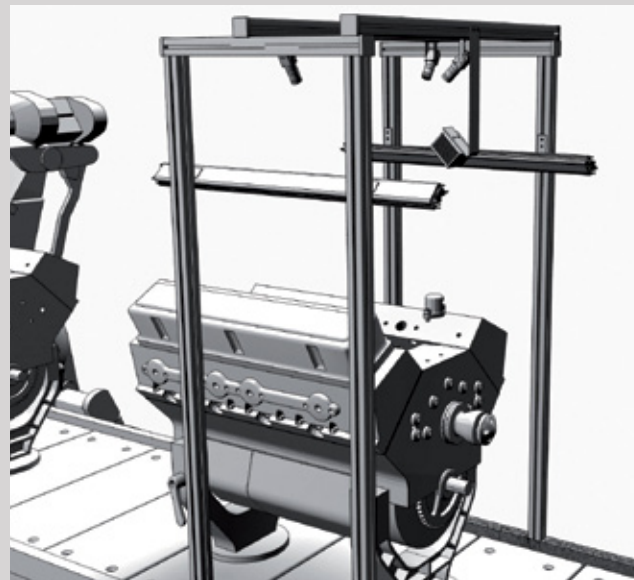

This inspection eliminates the need for manually verifying single or multiple features or components on a single assembly. These features may include proper orientation, right size or correct color as well as the ability to confirm multiple product configurations or variations. The benefit of 100% inspection, provided by the vision system, insures only the properly assembled product gets to the customer.

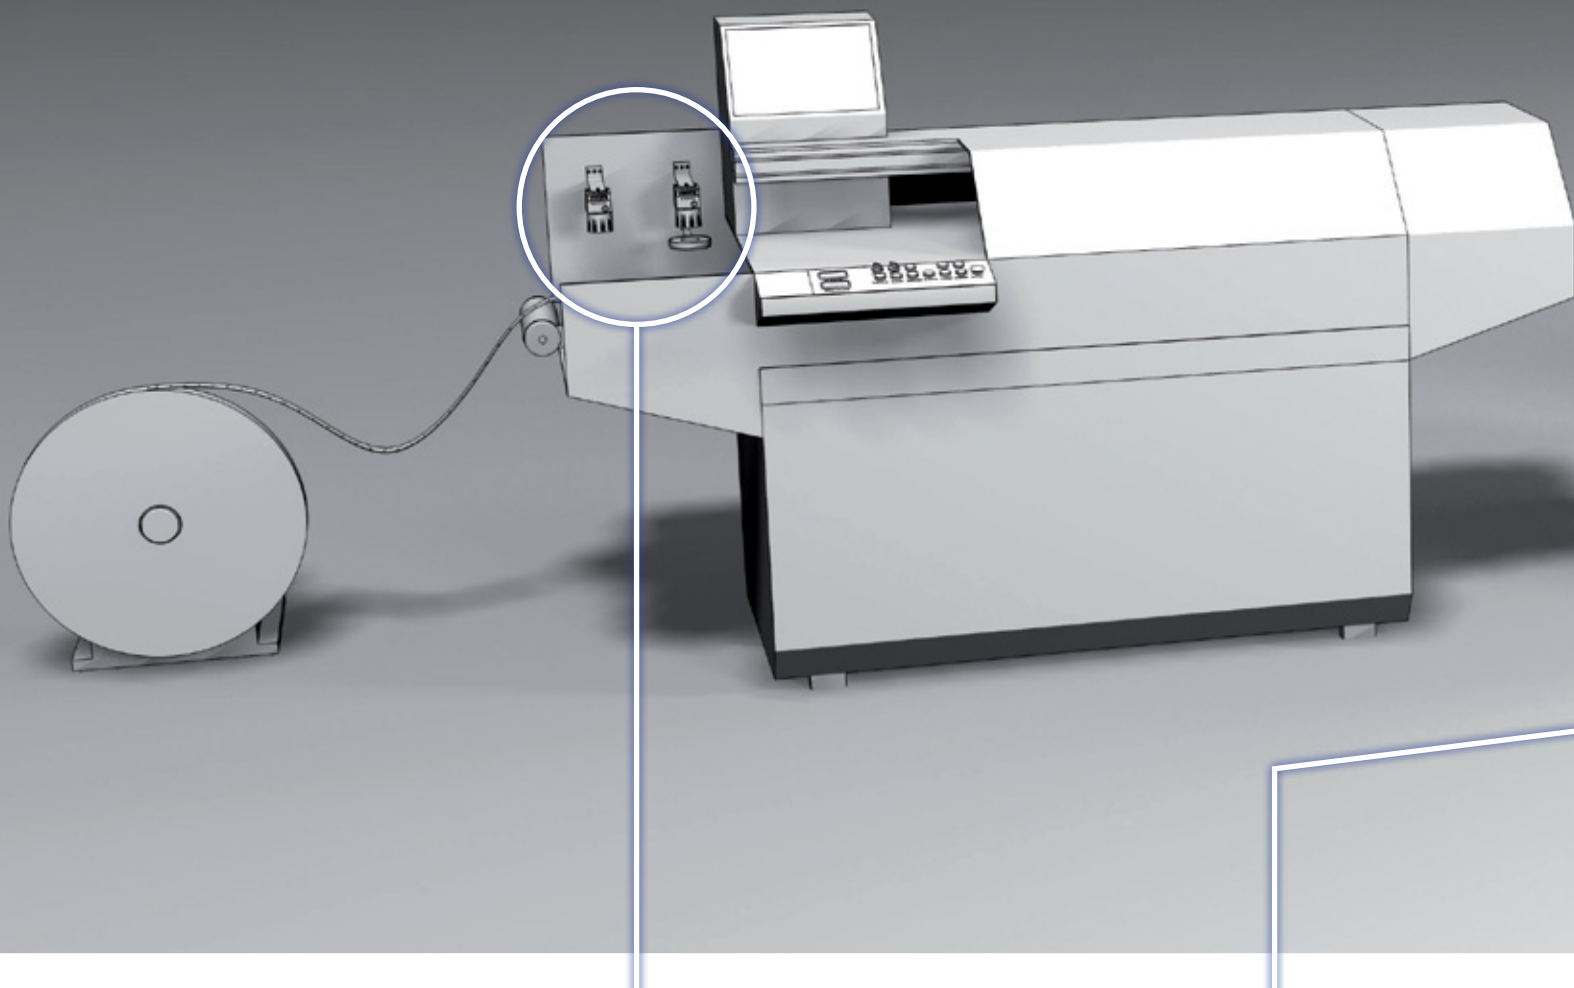


## Raw Material Inspection

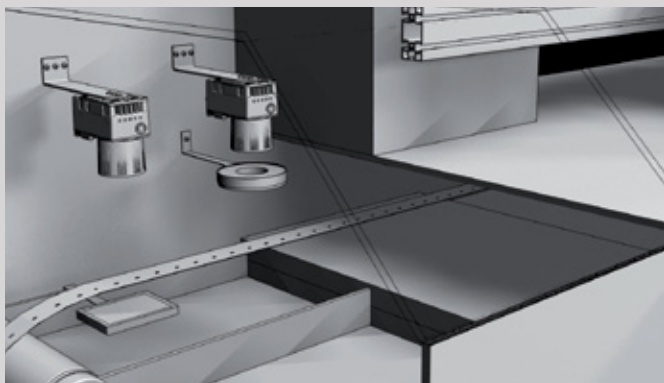


The pre-process inspection allows for inspection of raw material prior to secondary processing. This eliminates adding value to low quality material. In connector manufacturing, the strip width and pilot hole locations are critical to the process. Likewise, surface defects such as porosity, stains and scratch inspection is critical to the final product.

## Gold Plating Inspection

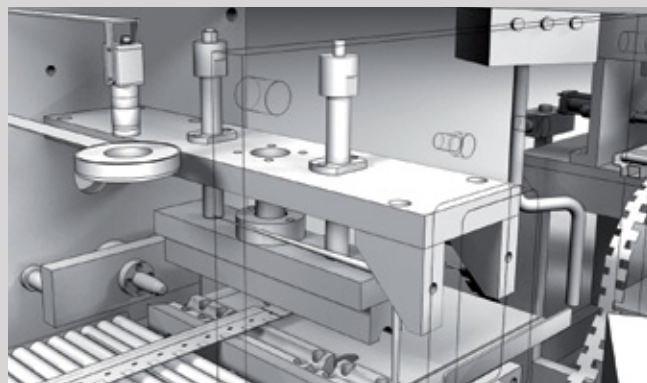


Post plating inspection provides assurance that highly value material such as gold is accurately placed in the correct position on the brass strip. 100% inspection of the plating allows the operator to monitor the process and make on the fly corrections to the high value continuous product with little or no downtime as well as low waste of processed material.



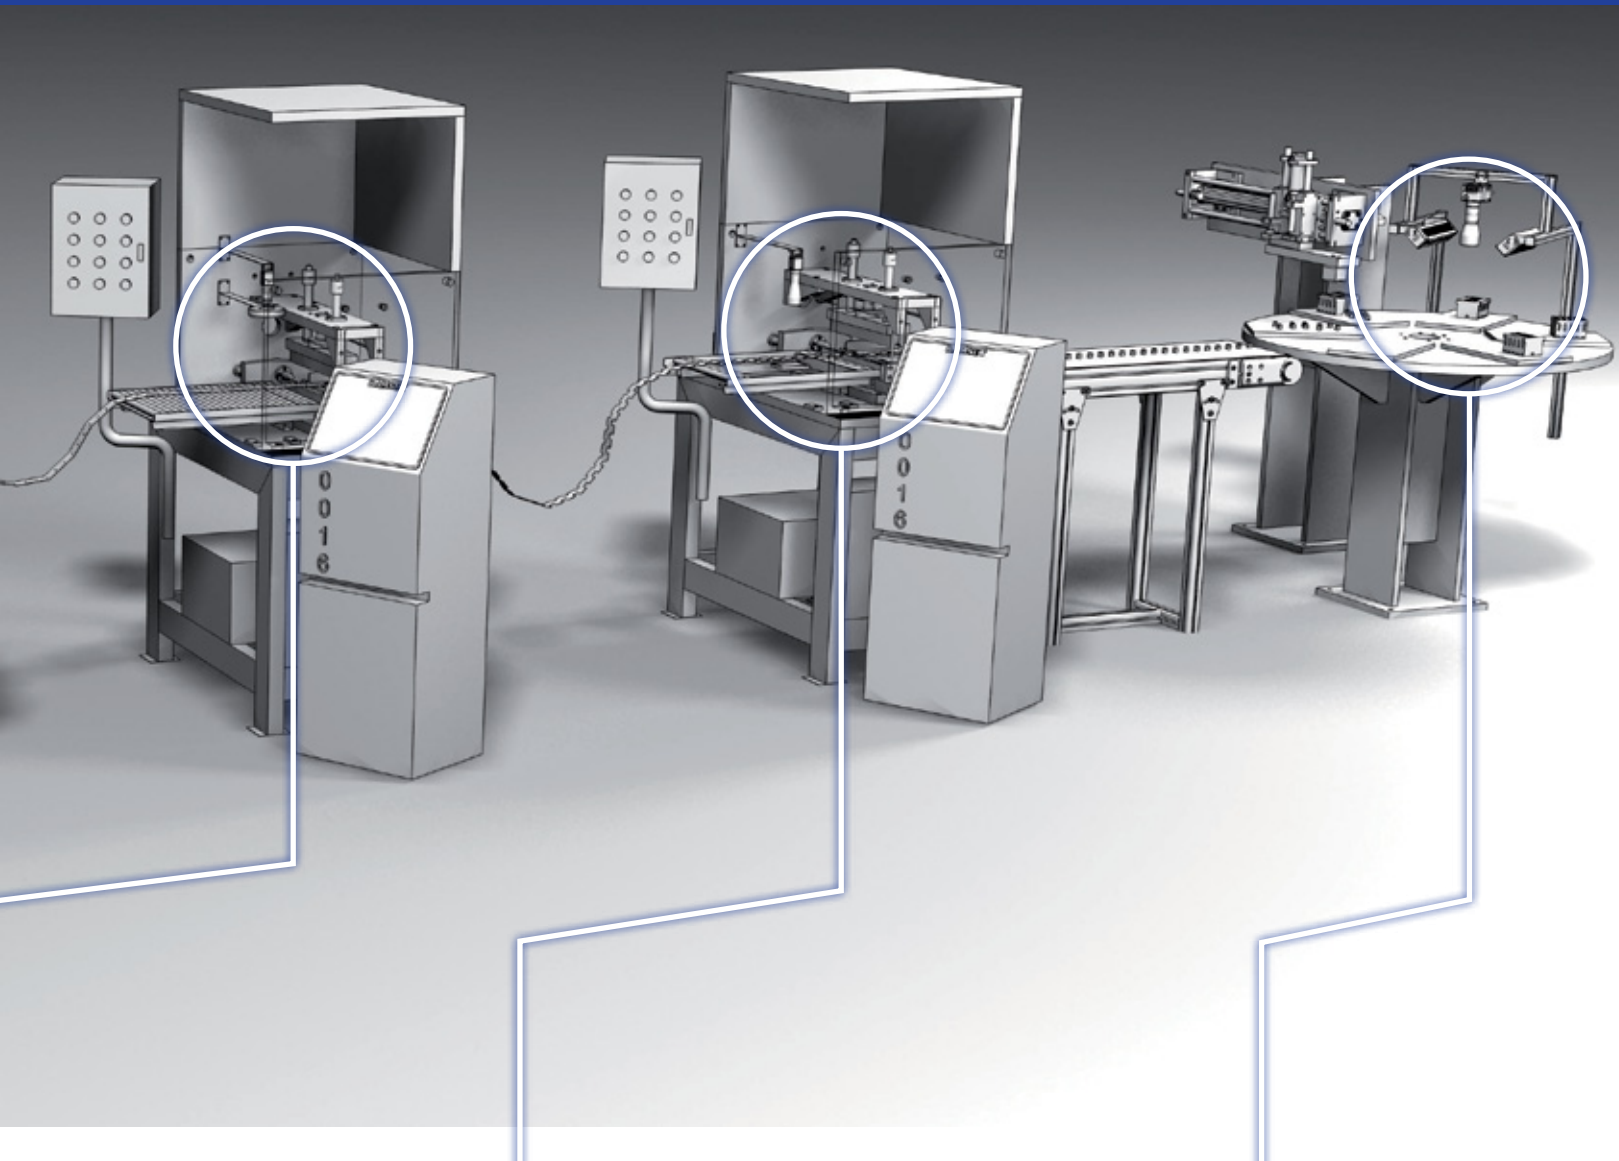


### Trimmed Material Inspection

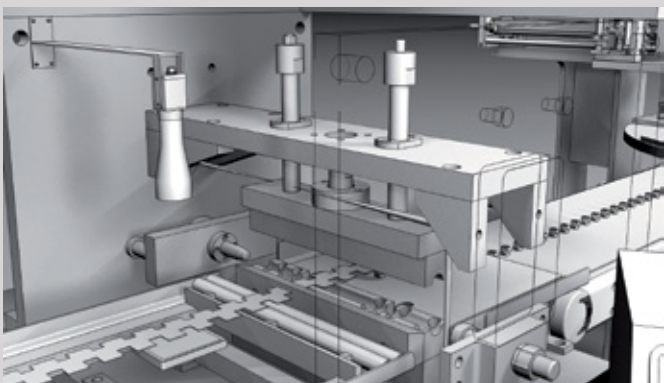


Post stamping inspection verifies 100% dimensional tolerance acceptance on internal features that cannot be inspected, without destructive methods, after the secondary forming or assembly is completed. Other types of inspections that can be addressed simultaneously include burr detection and secondary plating inspection.

### Insert Molding Inspection

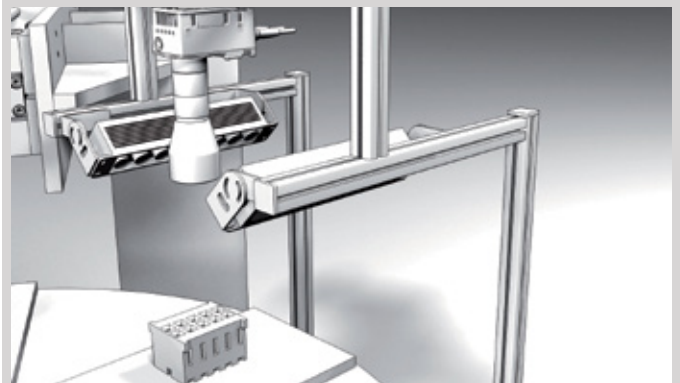

Insert molding inspection allows for verification of properly formed molded plastic housings as well as performing final measurement checks on critical dimensions of the connector. This inspection identifies areas of material shortage as well as excess material that can cause non sealing or locking conditions or excessive connector insertion forces.

# PACKAGING

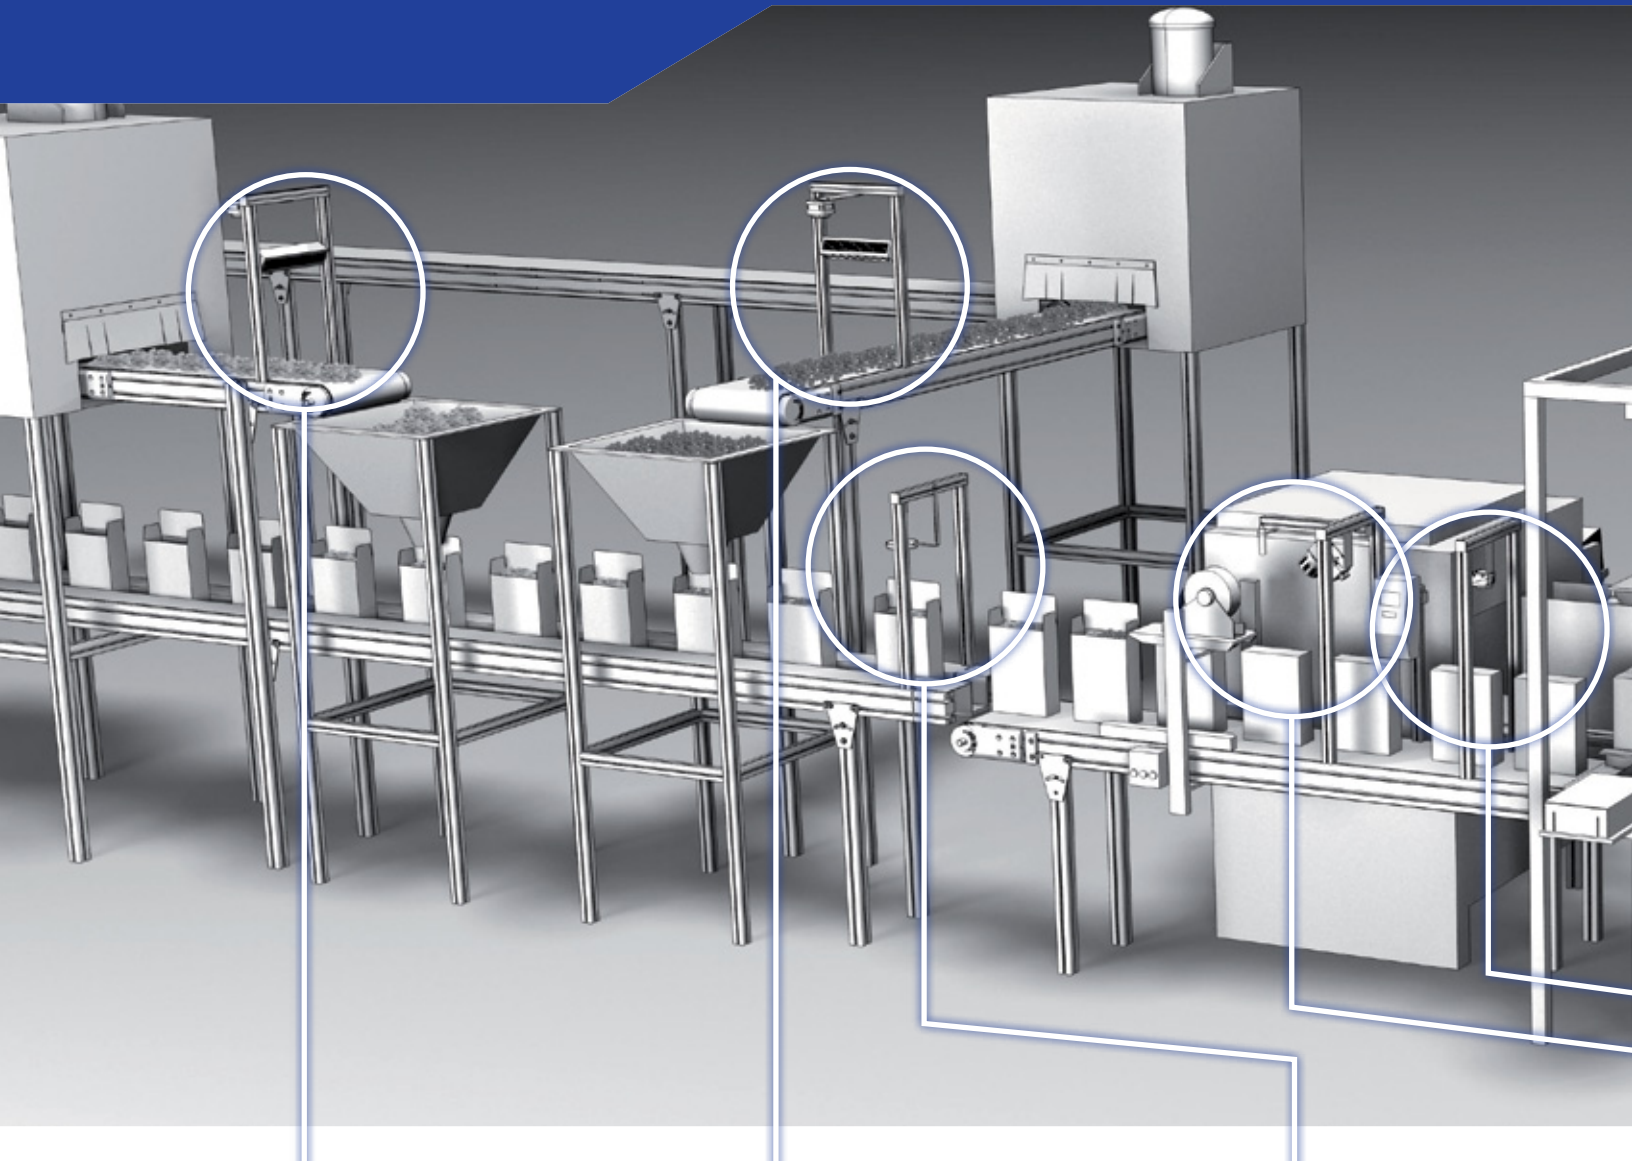

## Post Baking Inspection




This high speed inspection checks for the consistency of food products after coming out of the baking or frying process to guarantee the food is not over cooked or discolored and reducing customer complaints.

## Fruit Clump Detection




Clump detection identifies when certain types of food stick together to form large masses of food. Masses of food may not be fully processed or cooked, too large for the subsequent process and ultimately cause large amounts of waste or possible health concerns by being under processed.


## Content Fill and Mix Inspection

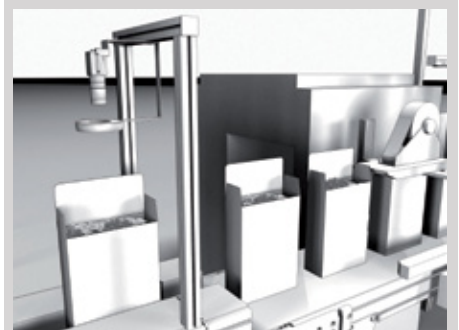

The content fill inspection provides assurance that the product is properly placed in the package and verifies the presence of any secondary components before the sealing of the package. With a properly configured system additional information such as product fill height can also be determined. These inspections help to guarantee the customer always receives the correct amount of product.

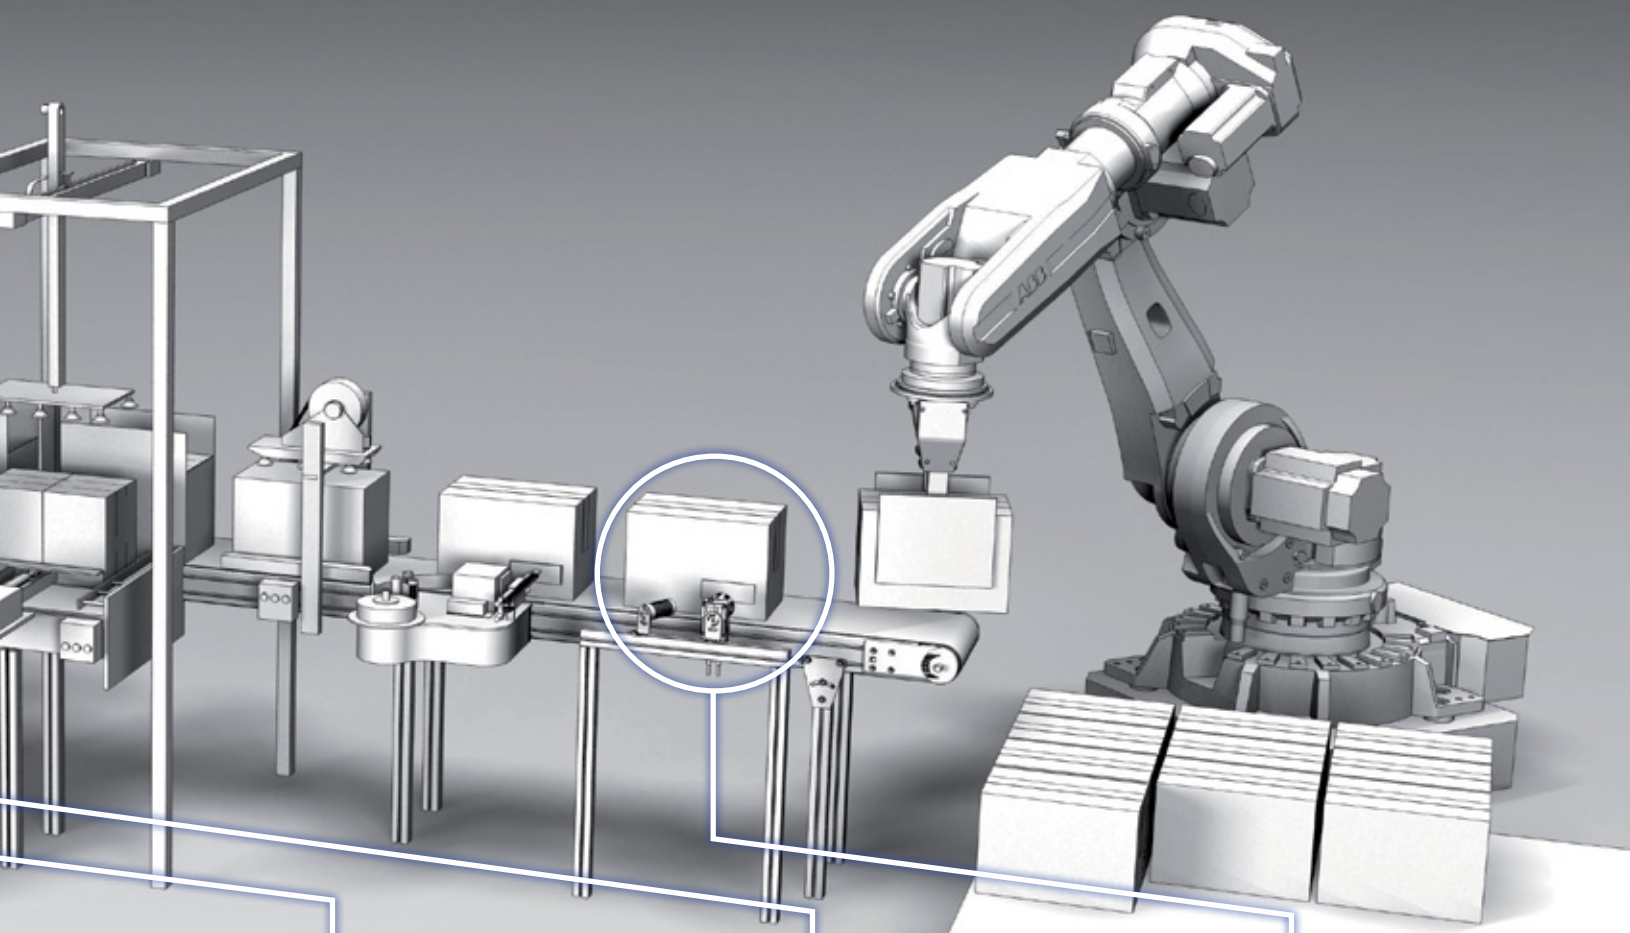

#### Open Flap Detection

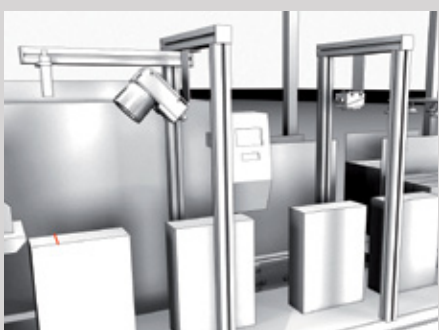

Flap detection verifies all of the flaps on a box food package are fully formed and sealed to insure freshness of the product as well as uniform shape for secondary packing of the product and a positive visual effect for the customer.

#### Expiration Date Presence




100% verification of date and lot codes and code quality can be accomplished with machine vision at extremely high rates of speed. This allows for traceability and regulation requirements of food products.

#### Label Inspection



Verifying the different variables on a label (e.g. product weight, cost, ingredients and current promotions) can be accomplished through the use of optical character recognition (OCR) as well as reading barcodes to identify product contents. This feature is especially important when tracking products that contain allergens or require the presence of other health related information on the label.



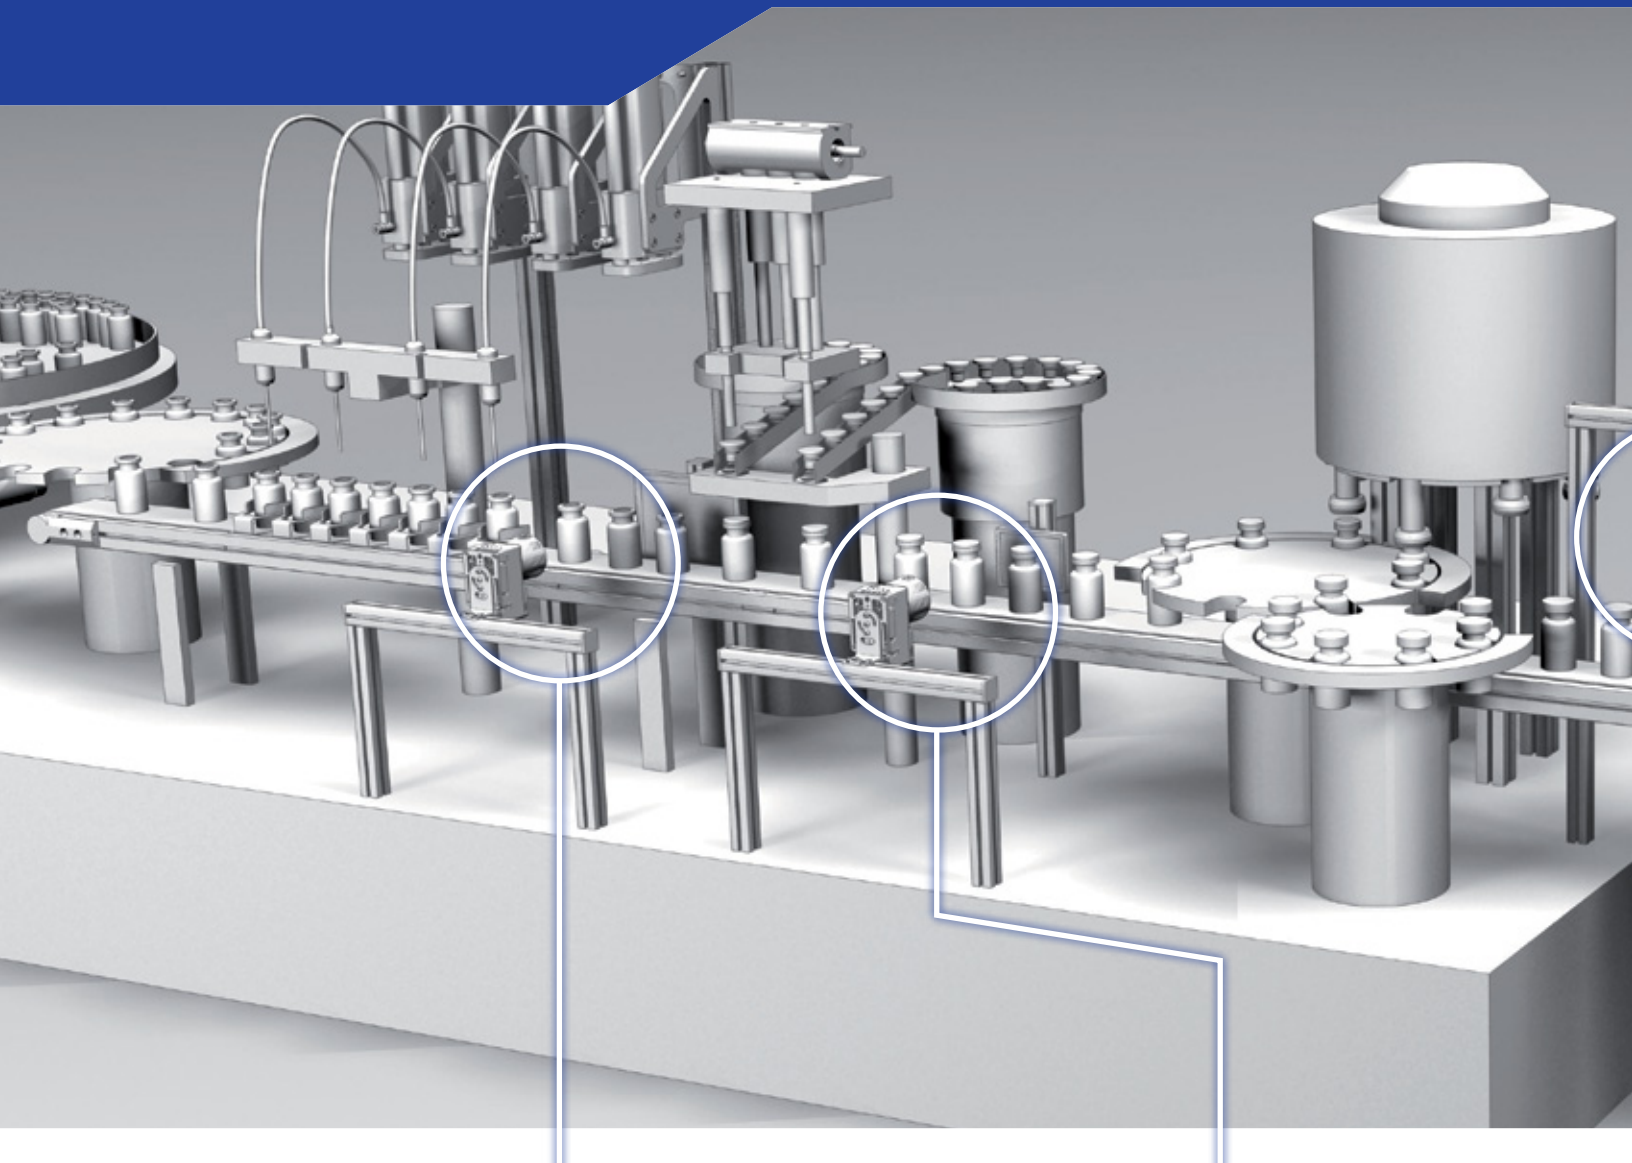

## Liquid Level Inspection




This inspection provides for the amount of liquid in transparent bottles and can be done quickly and effectively through the use of machine vision. Properly applied, this inspection ensures the bottle is filled to specification while eliminating waste and costs associated with overfill or under fill conditions.


## Cap Inspection



This inspection ensures the product quality by verifying the bottle cap is present and applied correctly. Normally, this inspection is performed at high rates of speed prior to the sealing and final packaging process where visual inspection is not possible without reopening the sealed package.

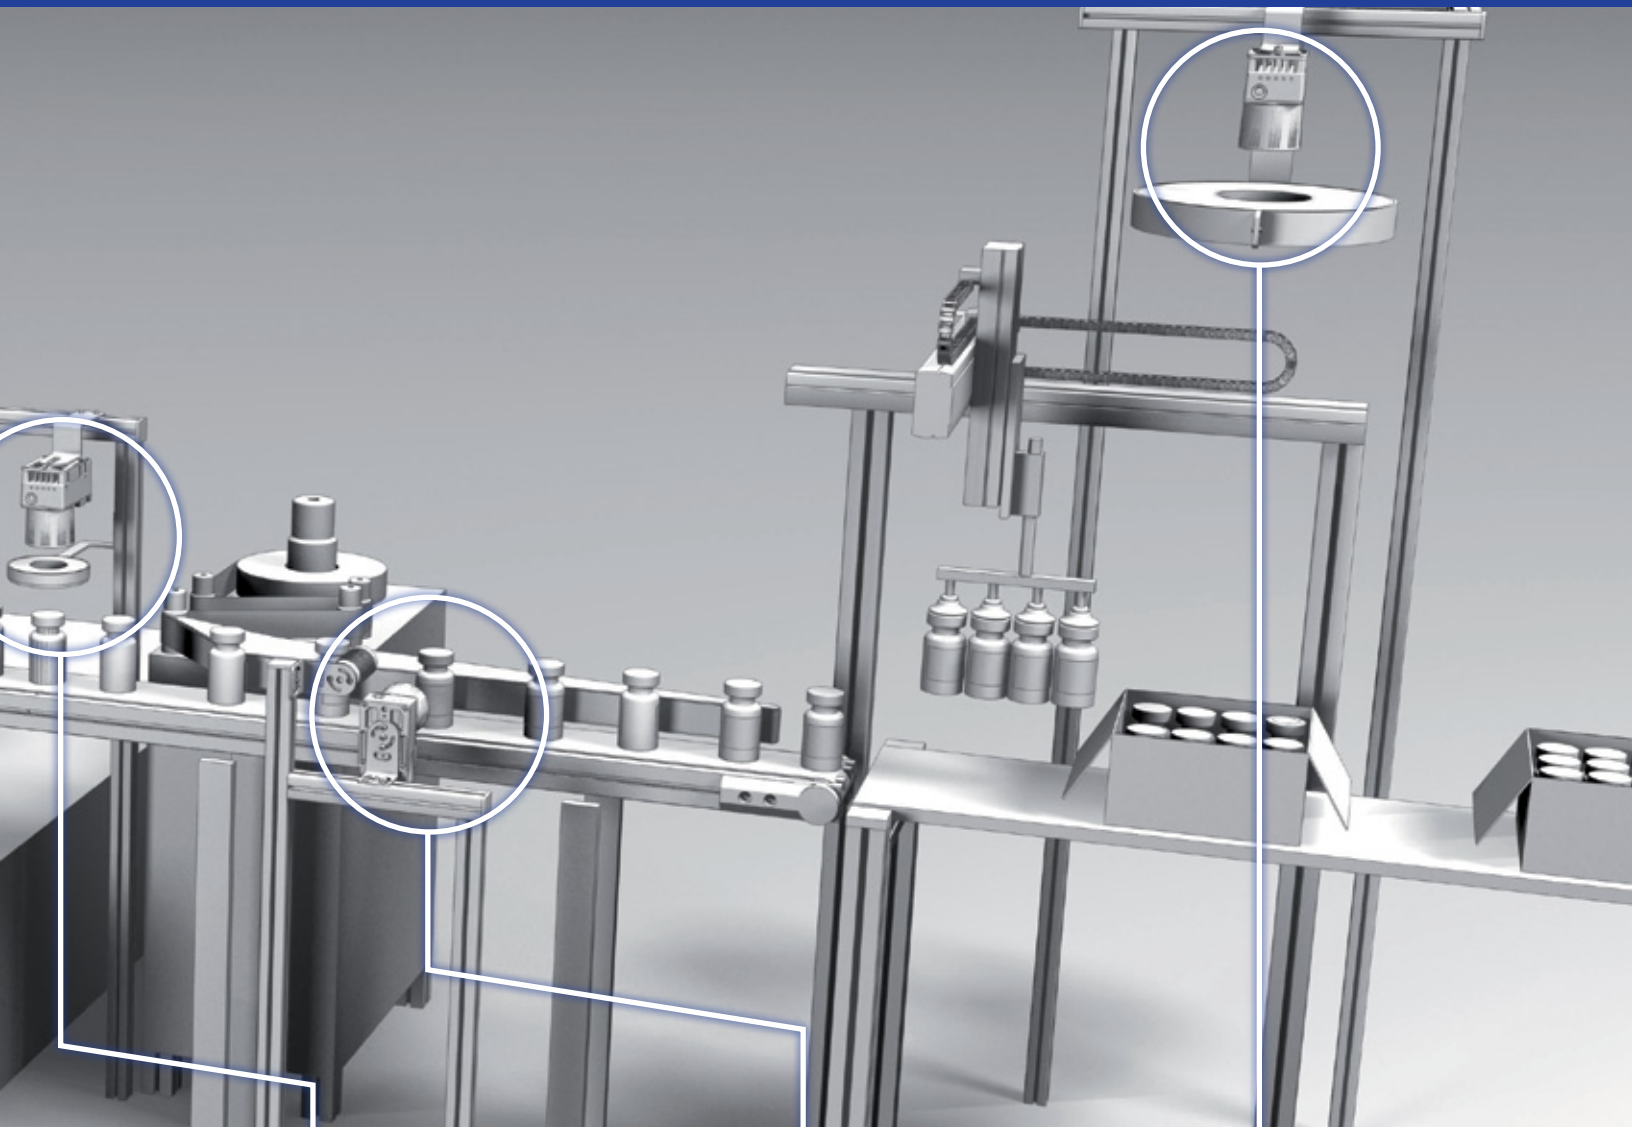


### Safety Seal Inspection

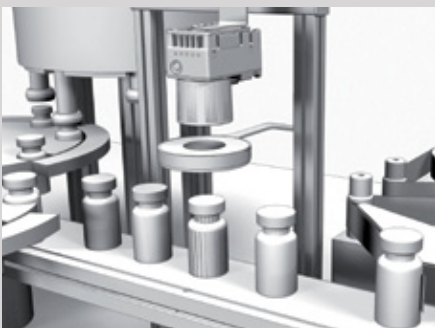


Verifies the product is protected with a properly applied tamper proof seal before leaving the factory or a clean area within the manufacturing facility. Ultimately, this inspection eliminates product contamination through the packaging integrity of the product.

### Label Inspection

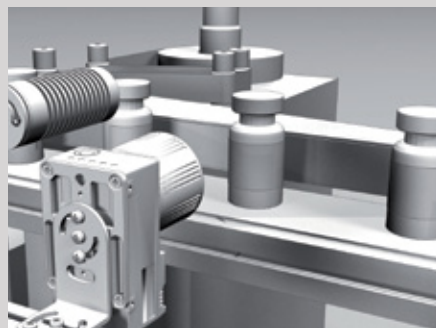

Checking for critical variable product information on labels (including product weight, ingredients, warnings, etc.) can be accomplished through the use of optical character recognition (OCR), barcode or matrix code readers – all available on smart cameras and vision systems. This feature is especially important when tracking products that contain materials that are ingested or require the presence of other health related information to be printed on the product label.


### Box Inspection

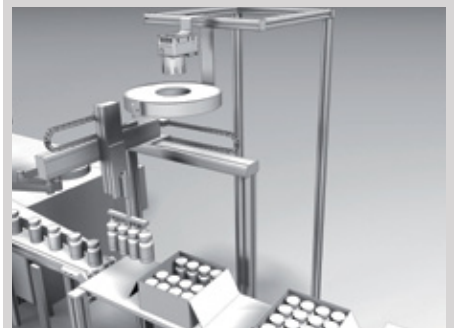


Allows the user to check for and verify the completeness of product packaging. This includes verification of the product count, product type and any miss-packaged or damaged items inside the product carton.



# GENERAL MANUFACTURING

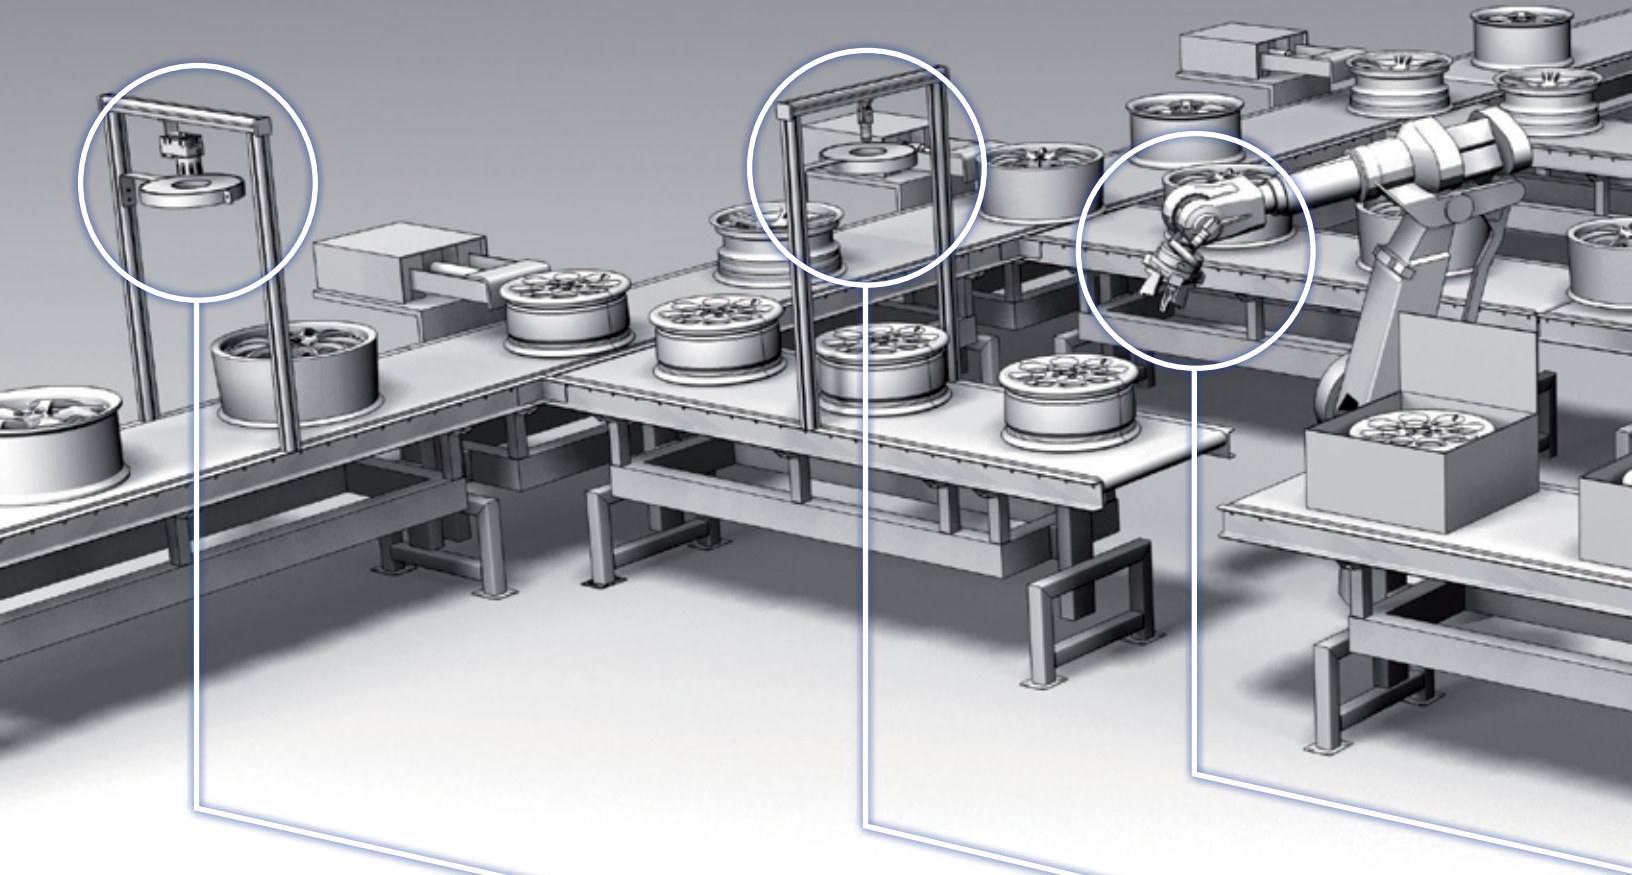

## Rim Sorting

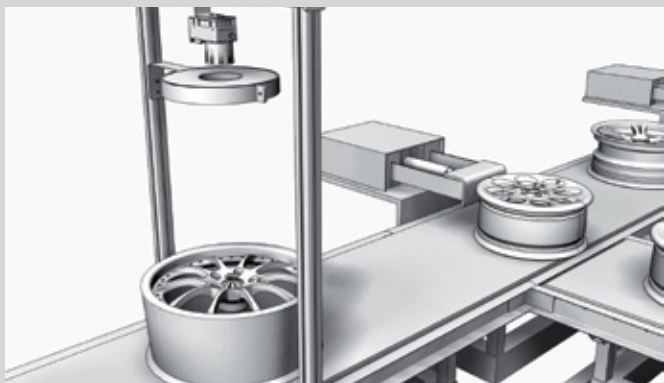


The vision system determines the product model by gross physical characteristics of the inspected rim. In this particular inspection, the key characteristics are the spoke pattern and product diameter. This type of inspection allows for more automation, which in turn, reduces added potential product damage by manual handling and increases the production rates through higher line efficiency.

## Rim Inspection




This vision system verifies the surface quality and inspects critical dimensions of key features. These inspections reduce any human subjectivity and collect process information that can be used to identify problem areas in the manufacturing line. This captured data is used for further analysis of the process and ultimately problem resolution, reducing costs related to returned products from unsatisfied customers.



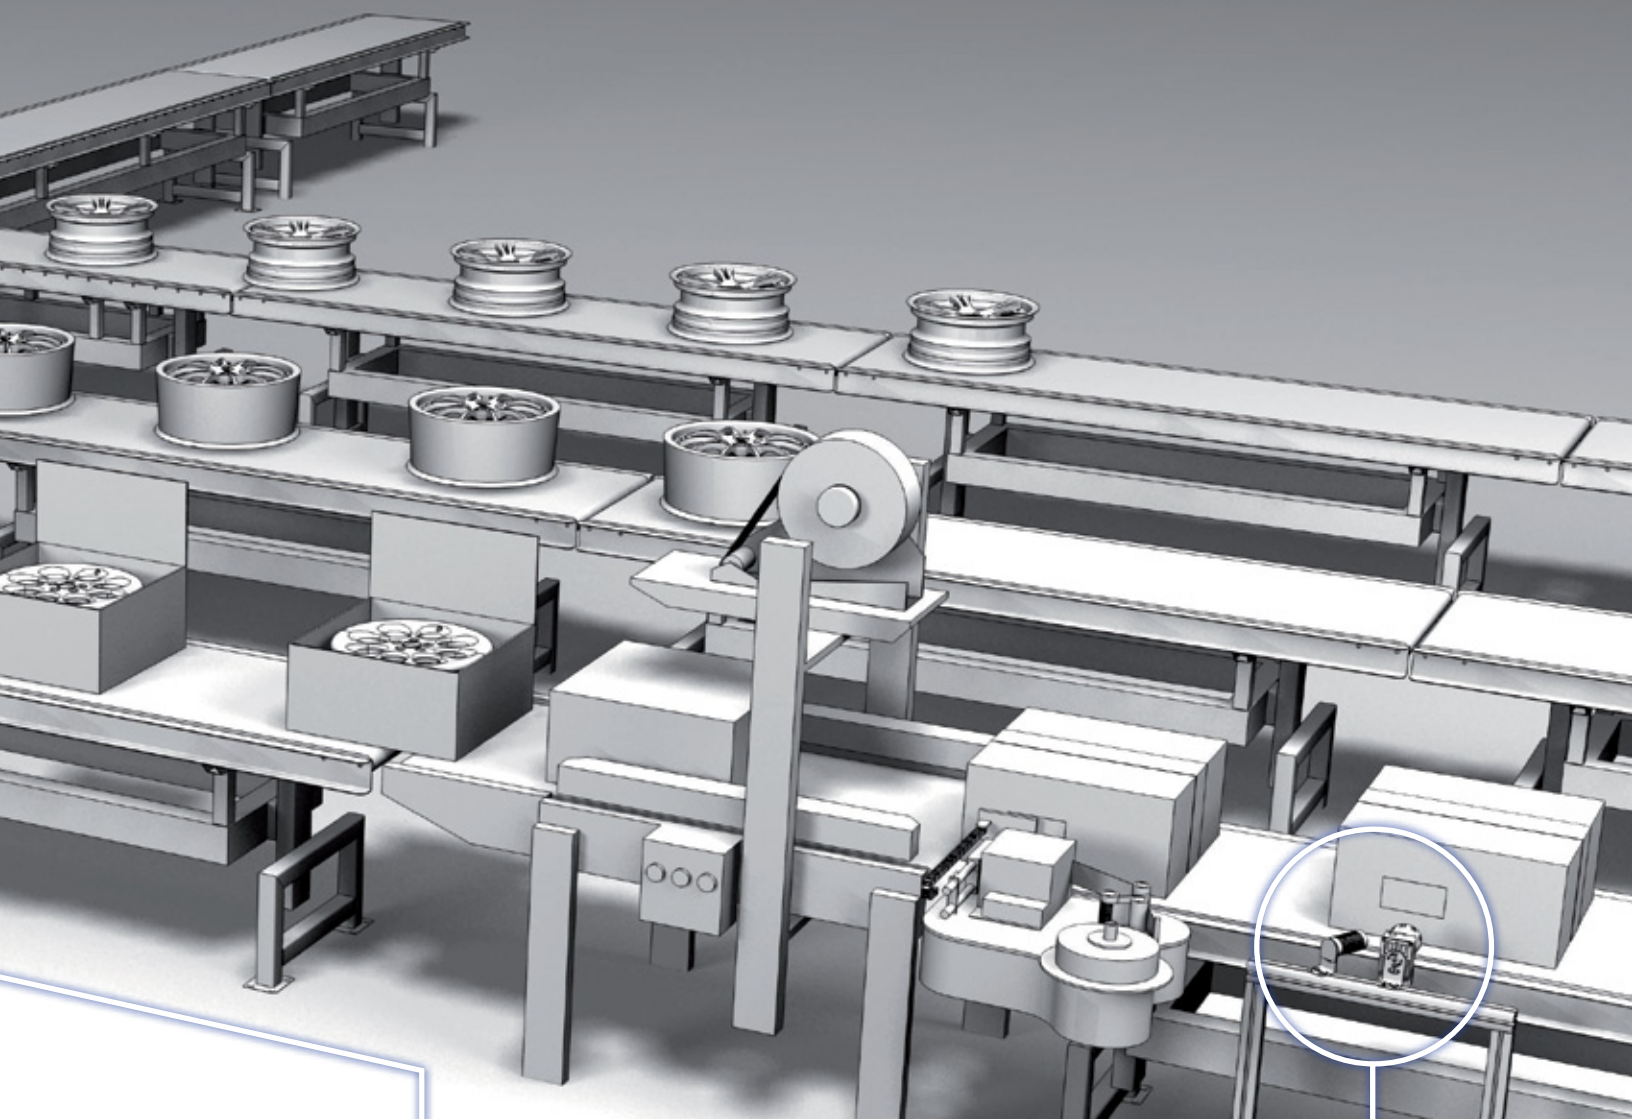


#### Rim Robot Guidance

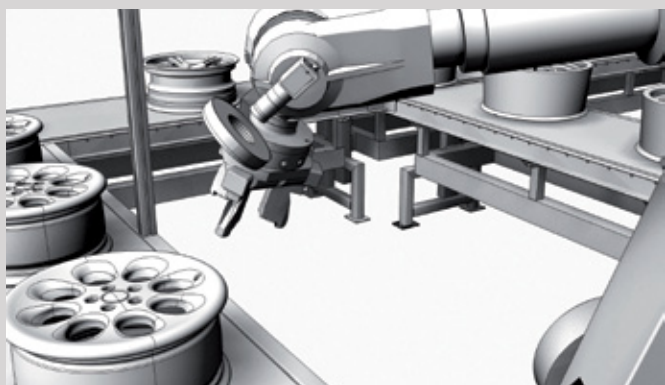

The vision system identifies the position and orientation of the rim to allow the robot to position itself correctly for picking up the rim. This type of guidance prevents damage to the rim due to incorrectly aligned fixtures on the robot.

#### Label Inspection

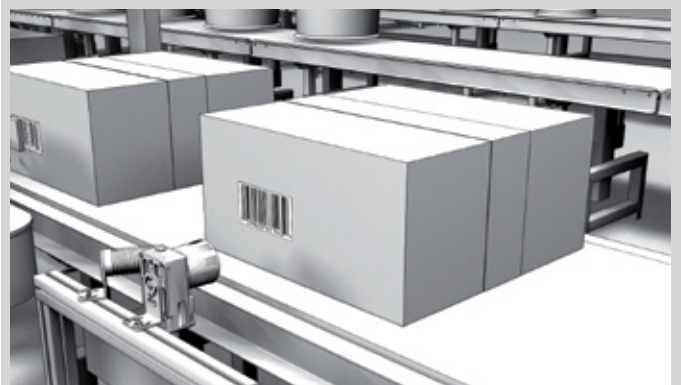

The vision system verifies the printed label matches the current product and ensures the label is readable for transportation and customer identification. This inspection prevents the return of incorrectly labeled parts from the customer and ensures stocking accuracy reducing costs related to miss marked parts.

# IMPACT SOFTWARE

Impact Software Suite, with over 120 inspection tools and 50 user interface controls, allows users to create unique inspection programs and develop user interfaces quickly and easily.

All this can be done without the loss of flexibility, like traditional configurable systems, or the need for vast amounts of development time like traditional SDK environments.

Impact Software powers the full line of integrated vision solutions, from simple to complex. The investment in software and training is preserved as inspections grow. Programs for the same inspections can be easily shared or transferred across multiple inspection points within the factory.

One software – countless applications!


## VISION PROGRAM MANAGER (VPM)

Vision Program Manager (VPM) provides hundreds of image processing and analysis functions. Use VPM to enhance images, locate features, measure objects, check for presence and read text and bar codes.

The screenshot displays the Vision Program Manager (VPM) software interface. The main window shows a flowchart for a 'Fastener Inspection' task. The flowchart includes steps such as 'Inspection Task', 'Inspection Start', 'Trigger ID', 'Set Inspection State', 'Check Part Presents', 'Part Present?', 'Find Part Position', 'Y Axis Origin', 'Part Found?', 'Convert Tolerance Value', 'Enable General Tolerance Measurement', 'General Diameter Tolerance', 'General Diameter', 'Enable Head Diameter Measurement', 'Head Diameter Tolerance', 'Head Diameter', and 'Enable Washer Diameter Measurement'. Each step is associated with 'Run Counts', 'Process Time', and 'Total Time'. The right panel shows a camera feed of a fastener with various settings for 'Find Objects That Are: Bright', 'Dark', and 'Adjustable Threshold', along with 'Noise Sensitivity' and 'Subpixel Method' options.

## CONTROL PANEL MANAGER (CPM)

Control Panel Manager (CPM) simplifies development of operator interfaces while providing the ability to make on-the-fly adjustments to critical machine controls. Use CPM to create operator interface panels to view and adjust critical machine controls.

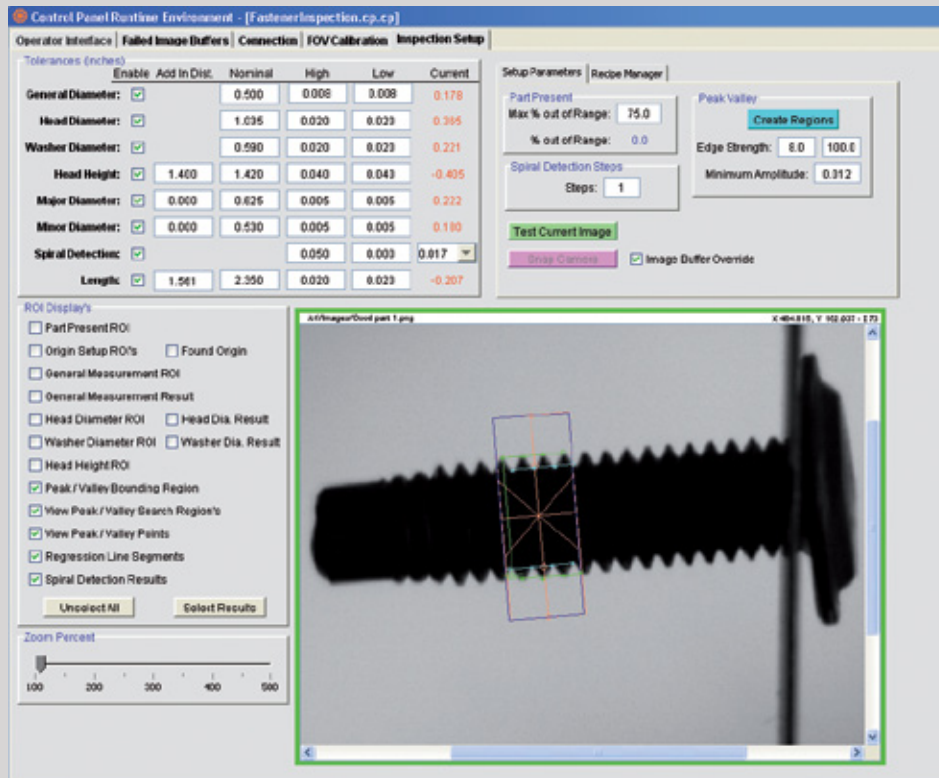

## FEATURES AND BENEFITS

### One software fits all

The entire range of smart cameras and embedded processors can be configured through the Impact Software suite. Users need only learn one program thus shortening their learning curve. Once developed, the same application can be used on different hardware platforms with no modifications or reprogramming.

### Ease-of-use

Impact Software suite is a graphical user interface where no programming is required. Neither VPM nor CPM forces a user to write code. Rather, developers need only to drag-and-drop tools into the tree view and set parameters. Thanks to the embedded emulator, settings can be tested immediately with images previously stored on the PC.

### Wide range of controls

With more than 120 controls, Impact is one of the most complete machine vision software suites available on the market. Image filtering, calibration, feature locating, flaw detection, measurement, and code reading are just few examples of the wide range of tools available which allow users to solve even the most challenging applications.

### Control Panel Manager (CPM)


Developers can easily create a customized user interfaces thanks to Control Panel Manager (CPM). This software allows users to build up full HMIs just by dragging and dropping controls onto a panel. Authorized operators have the possibility to check images, results and statistics as well as to adjust or modify the working parameters of inspection tasks.

## HIGHLIGHTS

- Easy to understand, tree-view logic flow
- Tool Setups guide users through step-by-step tool configuration
- Includes inspection and user interface development programs as well as a runtime user interface
- Runs on all smart camera and embedded system platforms
- Provides complete programmatic or manual control of hardware settings
- Provides real time parameter changes of cameras
- Controls and displays images and data from multiple smart cameras or embedded systems
- Password protection allows only authorized users to make changes
- Built-in Emulator saves time when creating, testing and debugging your vision program without a camera
- Software easily communicates with higher level control system via TCP/IP, Ethernet/IP, Modbus and OPC protocols.



## FEATURE FINDING

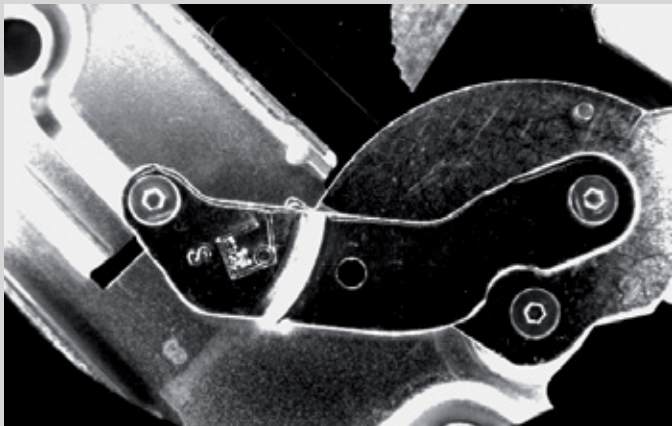


- Detect presence/absence of objects
- Detect randomly oriented or amorphously shaped objects
- Verify whether an object grayscale or color is within acceptable range
- Identify edges of uniformly bright or dark objects
- Determine the sharpness of an edge through the use of gradient

## FLAW DETECTION




- Determine if objects are out of range
- Filter objects based on size and shape
- Detect differences between a trained object and run-time objects.
- Detect subtle defects in varying background
- Detect defects along the boundary edge of objects

## LOCATE

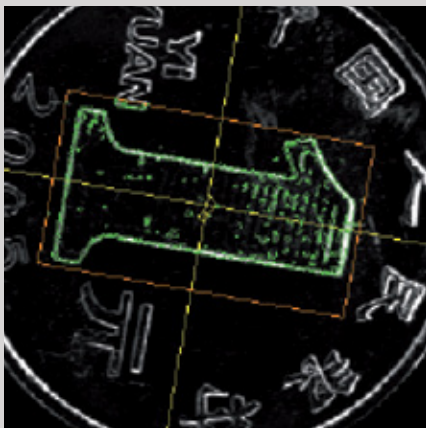

- Use a locate tool to find the object itself or a feature within the object to use as a reference for other tools
- Edge detection to find the corner of an object
- Find the center of mass of an object
- Multiple pattern find tools can be used to find a trained pattern within the image in 360° rotation

## IMAGE FILTERING

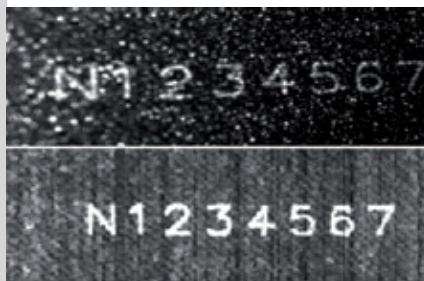

A complete set of image filtering tools available:


- Average, Median, Gaussian
- Morphology open, close, erode, dilate
- Edge enhancement
- Binarization
- Image subtraction
- Light leveling
- Pixel fill

## COLORS



- Find randomly orientated or amorphously shaped colored objects
- Compare an object color with a trained color
- Color image offers red, green, blue, yellow, magenta, cyan and greyscale formats for use by other tools

## MEASUREMENT

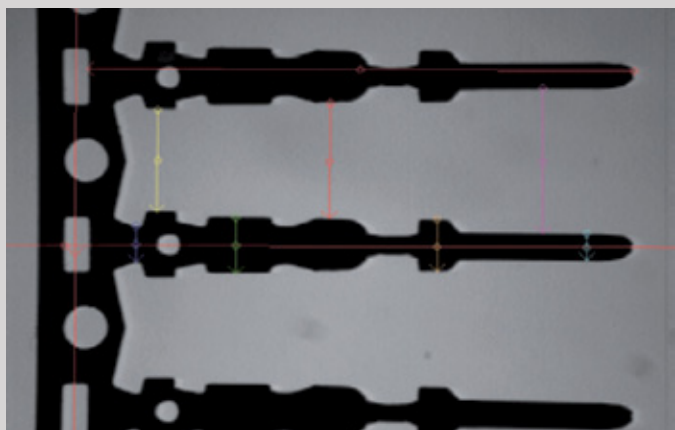


- Pixel or subpixel accuracies are possible
- Measure the angle between linear objects
- Make multiple measurements within one tool
- Point to point and point to line measurements
- Measure radius, center, and concentricity of circular objects

## CODE READERS & OCR




- State of the art 1D and 2D barcode readers. Find multiple codes within one image
- Extremely wide range of code symbologies supported
- Omni-directional code reading
- OCR – Optical Character Recognition – able to read character strings
- OCV – Optical Character Verification – able to verify if the content of a string matches with a trained one

## LOGIC PROGRAMMING

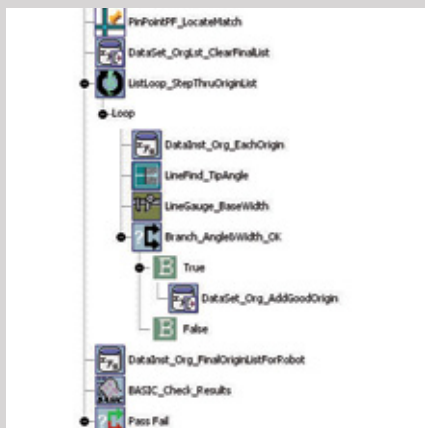


- Tree-view programming structure allows for better tool organization and only run tools when requested
- Logic tools allow for decision-making capabilities without scripting
- Perform logical and mathematical calculations in a flexible and easy way

## IMAGE CALIBRATION

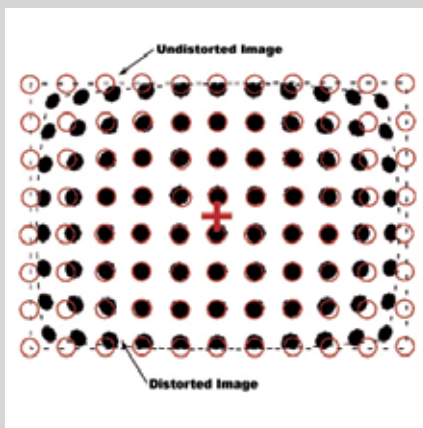

- Allows a user to remove perspective and radial distortion from an image as well as convert pixel to real world values
- Unwrap a curved object or correct a slanted object within an image (primarily used with OCR)
- Combine multiple images into one large image
- Reduce resolution by sampling the image


## DATA COMMUNICATION

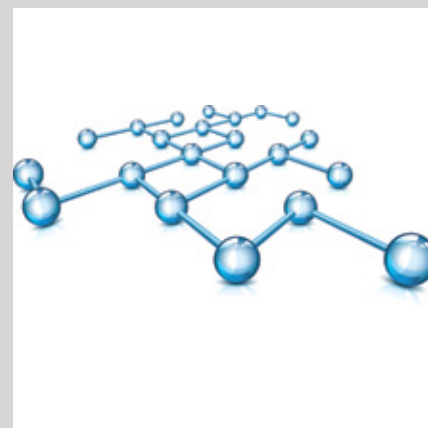

- Discrete I/O, serial, TCP/IP and Ethernet/IP available
- Supports HTTP, FTP and web serving protocols
- ActiveX controls available for 3rd party Microsoft® applications
- Modbus, PCCC and OPC server communication

# UNDERSTANDING MACHINE VISION

## MACHINE VISION




Machine vision is different from human vision. Human brain infers what eyes cannot see. It can create composite images from multiple angles.



A and B squares seem to have different colors (i.e. A darker than B) but actually they do not. By removing surroundings, they have exactly the same greylevel and this is how they are perceived by an electronic eye.



A machine vision monochromatic (greyscale) image will only show differences in contrast. So, a good image for machine vision is different than for human vision.



## Machine vision glossary


**Working Distance (WD):** The distance from the front of the lens to the object when in sharp focus.

**Field-of-View (FOV):** The imaging area that is projected onto the imager by the lens. Note that most imagers used today provided a 4:3 aspect ratio (4 units wide and 3 units high).

**Depth-of-Field (DOF):** The range of the lens-to-object distance over which the image will be in sharp focus. Note that the shorter a lens' focal length is, or the more closed a lens' aperture is, the greater the available depth of field.

**Resolution:** The ability of an optical system to distinguish two features that are close together. Note that both imagers and lenses have their own respective resolutions. Always consider the benefits of better camera resolution, but lens resolution is nearly always better than needed for most factory applications.

## CAMERA SELECTION



## Resolution

Resolution is a measure that identifies the camera capability to acquire image details. Higher resolution means more image detail. The convention is to describe the pixel resolution with the set of two positive integer numbers, where the first number is the number of pixel columns (width) and the second is the number of pixel rows (height), for example as 640 by 480. Another popular convention is to cite resolution as the total number of pixels in the image, typically given as number of megapixels, which can be calculated by multiplying pixel columns by pixel rows.

### Acquisition (frame) rate


Frame rate is the frequency (rate) at which a camera is able to acquire consecutive images (area scan camera) or consecutive lines (line scan camera). Frame rate is typically expressed respectively in Frames Per Second (FPS) or Thousands of Line per Second (KHz).

## Greyscale VS Color

Most of machine vision applications are solved using greyscale cameras. In a greyscale image the value of each pixel represents the light intensity information. The color depth identifies the number of different intensities (i.e. shades of grey) that can be detected by every image pixel. Color depth is typically expressed in bits or greylevels (e.g. 8 bits = 256 different shades of grey).


8 bit(256 greylevels)	0	26	51	77	102	128	153	179	204	230	255

On the contrary color images contain 24 bits of information per pixel (as opposed to a grayscale's 8 bits), thus giving a color camera 3x more dynamic sensitivity. Note that most color cameras actually use a grayscale imager with a Bayer Filter. Intensity passing through 2x2 pixel grids are interpreted and converted into a color image. Note that there are twice as many green pixels since the human eye is most sensitive to green.

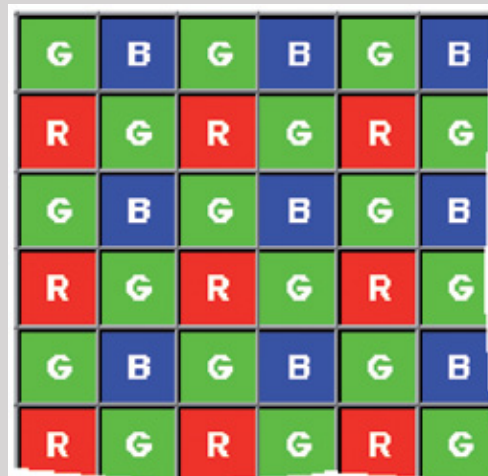



## LENS SELECTION

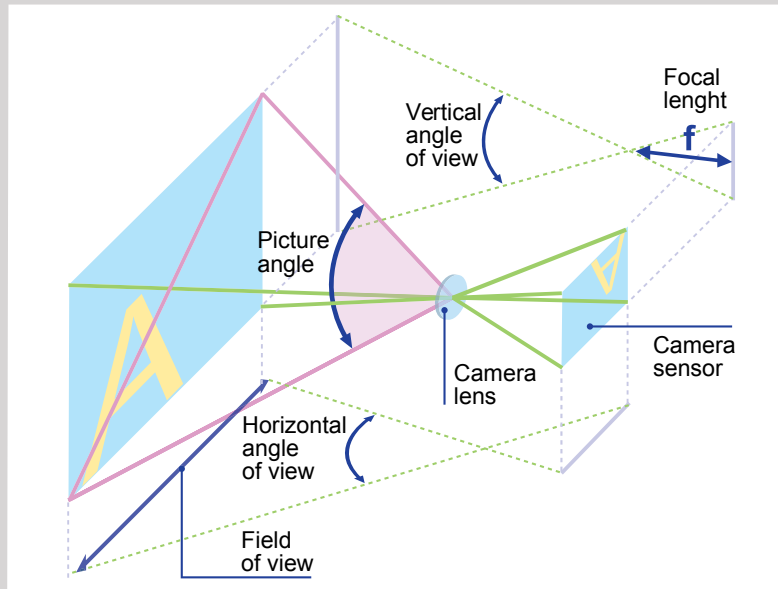

### Focal Length:

The focal length of a lens is defined as the distance from the optical center of the converging lens to the focal point, which is located on the imager, when "in focus". Units are typically in mm.

### Aperture (f-stop):

The ratio of the focal length of the lens to its effective diameter. Shown as f-stop or f/f. Each f-stop would allow either 1/2x or 2x light compare to the next f-stop. A larger aperture opening results in a smaller f-stop value. Note that the more closed a lens' aperture is, the greater the depth of field.

### S-MOUNT



S-Mount lenses feature male M12 thread with 0.5 mm pitch on the lens and a corresponding female one the lens mount. Most commonly used with "remote-head" cameras or with very compact devices like Vision Sensors.

### C-MOUNT




C-mount lenses provide a male thread which mates with a female thread on the camera. Most common standard, used with VGA resolution (640x480) up to 2 Megapixel cameras.

### F-MOUNT




F-Mount lenses feature a three lug bayonet mount with a 44 mm throat and a flange to focal plane distance of 46.5 mm. Mainly used for high resolution cameras.

## CONVENTIONAL VS TELECENTRIC LENSES

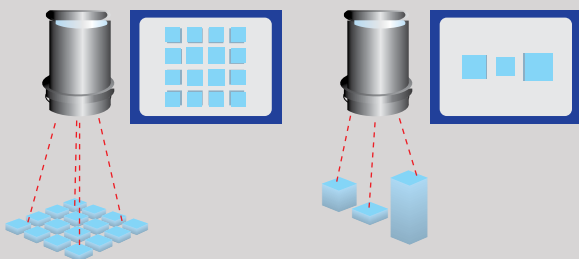


Conventional Lenses view in a conical shape and generally produce magnification errors in radial bands about its center, thus producing magnification errors when viewing objects at different distances.

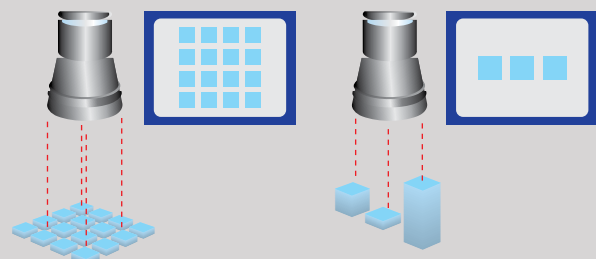

Telecentric Lenses offer constant magnification with change in distance. These lenses are used for high-precision measurement of objects at different depths.

# UNDERSTANDING MACHINE VISION

## BASIC CONCEPT

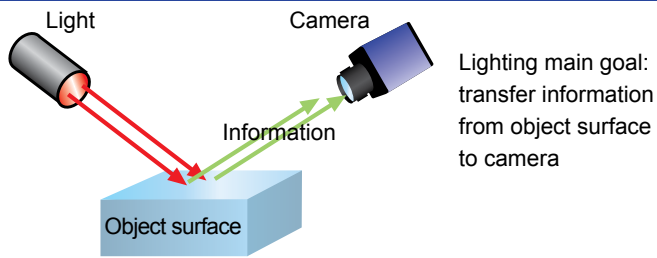


## THE IMPORTANCE OF MATERIALS

Material and surface finishing are important as well.




Surface reflectivity difference between the machined aluminum and cast aluminum (direct vs. scattered light)

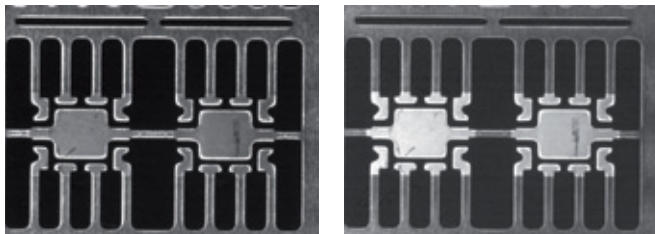


Copper & Silver terminals: red illuminator (on the left), blue illuminator (on the right)

## LIGHT INTERACTIONS

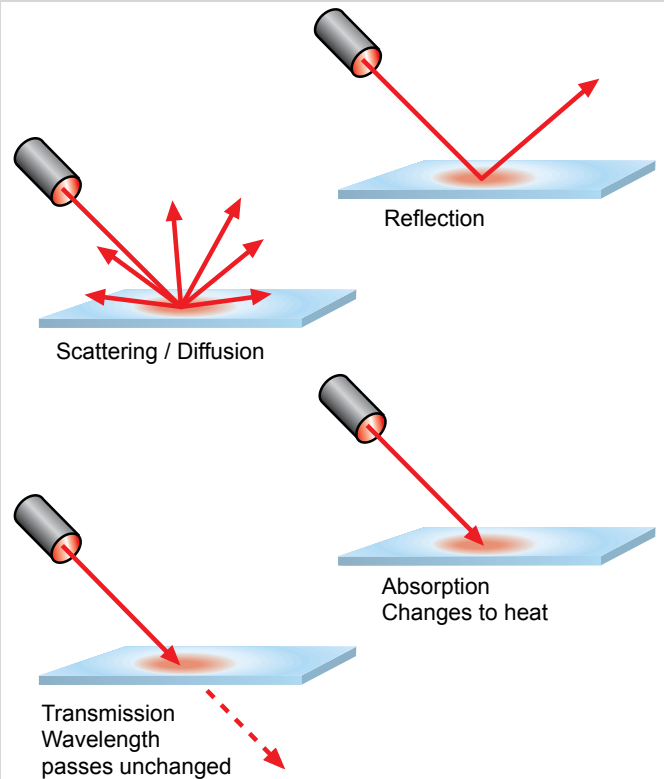

In machine vision the main goal is to optimize the contrast between the features that must be inspected and their background. In order to do so, light interaction principles must be taken into consideration and properly exploited. The characteristics of an object will determine how light is reflected or absorbed.

## LIGHTING TECHNIQUES

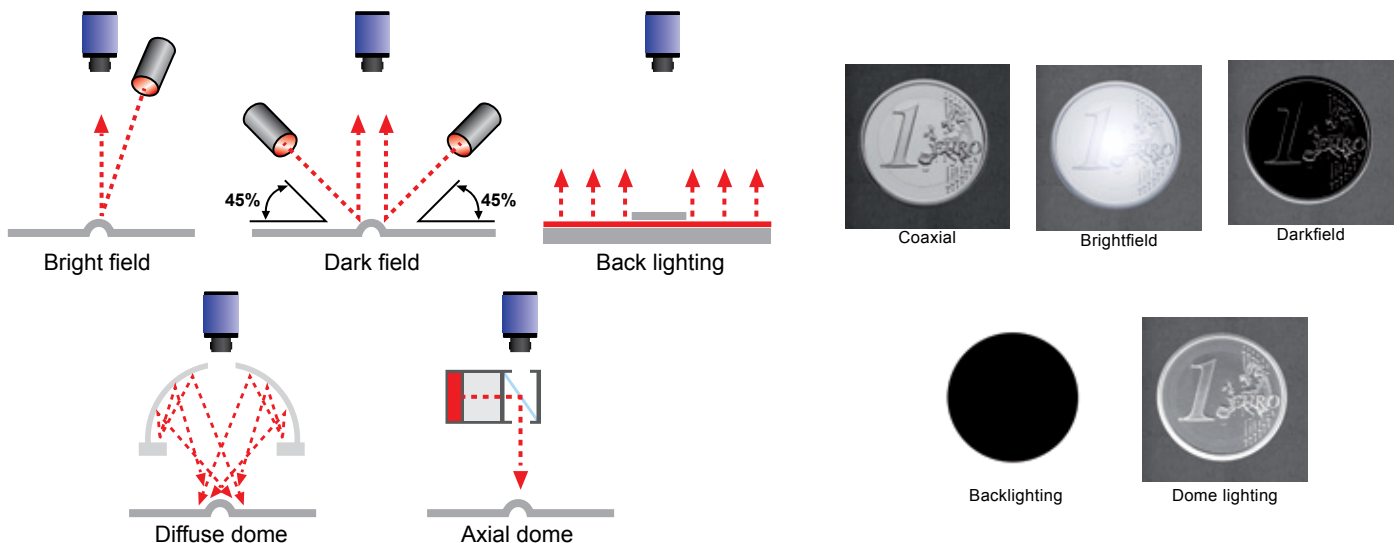


## THE IMPORTANCE OF COLORS




Colors affect acquired images even when monochrome cameras are used. Rule of thumb:

- In order to brighten, use same color lighting as compared to the object
- In order to darken, use opposite color lighting as compared to the object

## LIGHTING COLOR



## CONSTRAINTS

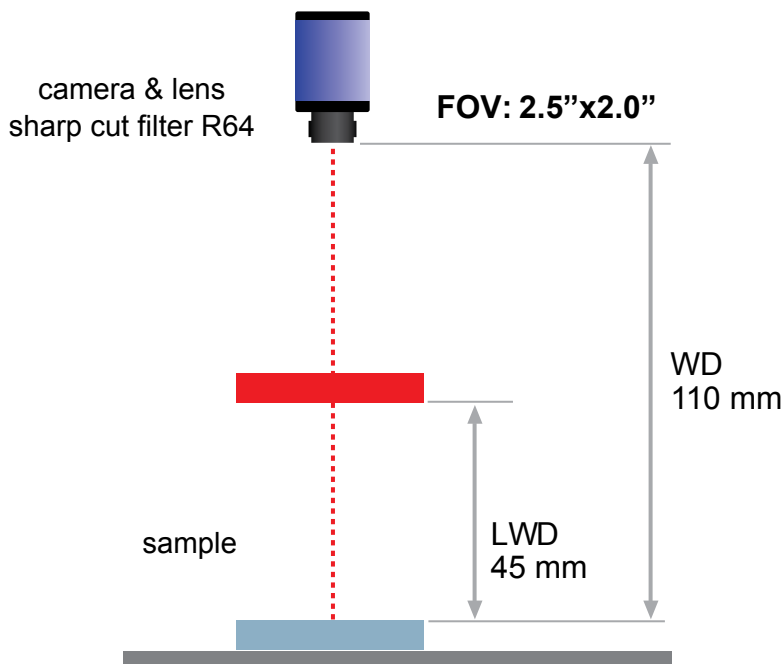

When evaluating a machine vision application, mechanical constraints must be carefully evaluated and considered since they may limit the lighting and lensing solutions.

Space (volume) constraints

- What space is available for lighting?

Speed of inspection

- Limits what lighting (strobed or static) and what inspection tools can be used

Environmental issues

- Specific IP rating requirements?



# VISION SENSORS

## DataVS1



- Quick setup without PC
- Fully embedded vision sensor
- 3.5" colour display, 8 push-buttons, 8 LEDs
- 8 different controls
- Memorization of 20 different inspections

The DATAVS1 series is the easiest solution for machine vision applications. The setup is very quick and intuitive thanks to the VSC unit, the external configurator with 3.5" colour display. The sensor setting is carried-out through three simple steps: region of interest definition, control type selection, parameter adjusting. DATAVS1 is a fully embedded vision sensor able to acquire images, control them and activate digital outputs according to the result. The VSC unit can provide a real time monitoring of the images, but it is not required during the functioning of the sensor and so it can be disconnected and used to setup multiple sensors. DATAVS1 is able to carry-out 8 different controls: Brightness, Contrast, Position, Width, Edge counting, Pattern match, Pattern match counting, OCV. Its flexibility together with the VSC configurator make the sensor ideal for plants with frequent format changes (packaging, food, cosmetic, bottling, labelling,...).

## DataVS2



- Flexible and intuitive setup via PC through Ethernet
- Memorization of 20 inspections
- 14 different controls
- Logical operators: AND, OR, NOT, NAND, NOR, etc.
- TURBO mode to double elaboration speed
- VSM compatibility

The DATAVS2 vision sensor series presents all the characteristics able to solve artificial machine vision applications in a flexible and intuitive way. DATAVS2 is a completely embedded device: the optic, the red LED illuminator and electronics are included in an extremely compact housing. The sensor is configured via PC through Ethernet communication. The configuration software is included in the product and it has been developed in order to lead the customer through the configuration process step by step. DATAVS2 is available in four different versions according to the installed control tools: Object Recognition (OBJ), Advanced Object Recognition (AOR), Identification (ID) and Professional (PRO). Many different control typologies are available: brightness, contrast, position, width, count, pattern match, contour match, 360° pattern match, barcode and datamatrix reader, OCV, 360° contour match.

## VSM



- 3.5" LCD color display and 8 push buttons
- 20 additional memory slots
- Image and result visualization
- Parameter fine tuning
- DIN rail or panel mounting
- 2 industrial M12 connectors

VSM is a monitoring device compatible with all DataVS2 vision sensor models. The device features a 3.5" LCD color display and 8 push buttons. It also embeds a standard TCP/IP Ethernet interface thus it can be connected either directly to a specific vision sensor or to a LAN where more sensors have been previously installed.

VSM allows to display images and results as well as to change the running inspection or also to adjust the vision sensor functioning parameters.

Thanks to this wide range of functionalities, the device represents an excellent and complete HMI interface ideal for automated production lines attended by operators.

## VISION SENSORS



	DataVS1	DataVS2
IMAGER	CMOS 8-bit gray-scale, 60 fps	CMOS 8-bit gray-scale, 60 fps
RESOLUTION	640 x 480 (VGA)	640 x 480 (VGA)
ILLUMINATOR	Integrated (RED)	Integrated (RED)
OPTICS	Integrated S-Mount (6, 8, 12, 16 mm)	Integrated S-Mount (6, 8, 12, 16 mm)
DEVICE CONFIGURATION	Configuration through Vision Sensor Configurator (VSC). No PC needed.	Configuration through PC (the DataVS2 Graphical User Interface software is supplied with the product)
MODELS	Basic	Basic (OBJ) Advanced (AOR) Identification (ID) Professional (PRO)
MEMORY SLOTS	Up to 20 inspections	Up to 20 inspections
DIGITAL I/Os	2 IN (trigger, inspection selection) 4 OUT	OBJ and AOR models 2 IN (trigger, inspection selection) 4 OUT  ID and PRO models 1 IN (trigger) 3 OUT
NETWORK INTERFACE		10/100 Mbps Ethernet
SERIAL COMMUNICATIONS		RS232 (ID and PRO models)
VSC COMPATIBILITY	.	
VSM COMPATIBILITY		.
CONNECTORS	2 x M12 8-pole	M12 8-pole (Power Supply + I/Os) M12 4-pole (Ethernet)
SUPPLY VOLTAGE	24 Vdc $\pm$ 10%	24 Vdc $\pm$ 10%
CURRENT DRAW WITH ILLUMINATOR	Max 200 mA @ 24 Vdc	Max 200 mA @ 24 Vdc
DIMENSIONS	70 x 52 x 40 mm (2.76 x 2.05 x 1.57 in)	70 x 52 x 40 mm (2.76 x 2.05 x 1.57 in)
OPERATING TEMPERATURE	-10 °C ... +55 °C	-10 °C ... +55 °C
MECHANICAL PROTECTION	IP50	IP50
CERTIFICATIONS (SAFETY COMPLIANCE)	CE, UL	CE, UL

# SMART CAMERAS

## A20



- Cost effective Smart Camera series
- Right-angle format
- WVGA (752x484) grey-scale imager
- Built-in digital I/Os and Serial interface
- Gbit Ethernet Port

The A20 smart camera provides the perfect balance of size, functionality and pricing to easily support a wide multitude of tasks ranging from simple quality controls to complex machine vision inspections. The A20 Smart Cameras features a WVGA 1/3" greyscale imager, discrete I/Os, Serial and Ethernet interfaces thus representing a fully embedded stand-alone device able to offer high return on investment solutions.

## A30 \*



- Cost effective Smart Camera series
- Right-angle IP67 rated enclosure
- VGA (640x480) grey-scale imager
- Built-in digital I/Os and Serial interface
- Gbit Ethernet Port

**PREVIEW**

The A30 Series is a stand-alone, general purpose and cost effective Smart Camera that can be installed even in harsh industrial environments thanks to its IP67 rated housing. The A30 Series features a VGA (640x480) CCD imager, built-in discrete I/Os as well as Ethernet and Serial interfaces. Thanks to the ultimate programming flexibility offered by Impact software, the A30 Series represents the answer to every machine vision need.

*\* available July 2013*

## T2x



- Mid performance Smart Camera series
- In-line or Right-angle formats
- Up to 2Mpix grey-scale or color imager
- Built-in digital I/Os and Serial interface
- Gbit Ethernet Port

The T2x Series smart camera products are stand-alone, general purpose, industrialized machine vision inspection systems that allow for incredible flexibility in programming through the Impact software. With models ranging from standard VGA resolution up to 2 Megapixels, the T2x Series smart cameras can deliver the right solution for your general-purpose machine vision needs or specific application inspection requirements.

## T4x



- High performance Smart Camera series
- Right-angle IP67 rated enclosure
- Up to 5Mpix grey-scale imager
- Built-in digital I/Os and Serial interface
- Gbit Ethernet Port

The new T4x-Series smart camera provides customers with outstanding performance in an industrialized and compact package. Equipped with a powerful 1.1 GHz processor, the T4x-Series performance is exceptional in value and functionality. The T-Series comes in 3 different camera resolutions, VGA, 2 Mega-Pixel and 5 Mega-Pixel all in a sealed, industrially hardened enclosure for maximum protection. Combined with Impact software, the new generation T-series delivers the most rugged and versatile smart camera solution in the market today.



## SMART CAMERAS



	A20	A30	T2x	T4x
FORMAT	Right angle	Right angle	Right angle In line	Right angle
IMAGER	• 752 x 484, 1/3" CMOS, 69 fps	• 640 x 480, 1/3" CCD, 60 fps	• 640 x 480, 1/3" CCD, 60 fps • 1024 x 768, 1/3" CCD, 16 fps • 1600 x 1200, 1/1.8" CCD, 12 fps	• 640 x 480, 1/3" CCD, 60 fps • 1600 x 1200, 1/1.8" CCD, 15 fps • 2456 x 2058, 2/3" CCD, 15 fps
IMAGE	8-bit gray-scale	8-bit gray-scale	8-bit gray-scale 24-bit color	8-bit gray-scale
LENS MOUNT	C-Mount	C-Mount	C-Mount	C-Mount
PROCESSOR	667 MHz Power PC	800 MHz DaVinci	667 MHz Power PC	1.1 GHz DaVinci
ON-BOARD IMAGE BUFFERING	Up to 46	Up to 16	Up to 54 @ VGA resolution	Up to 16
ON-BOARD PROGRAM STORAGE	512 MB flash	256 MB flash	512 MB flash	256 MB flash
DEDICATED ON-BOARD OPTICALLY ISOLATED I/O	1 IN / 1 OUT	1 IN / 1 OUT	1 IN / 1 OUT	1 IN / 1 OUT
CONFIGURABLE ON-BOARD OPTICALLY ISOLATED I/O	2 IN / 4 OUT	1 IN / 2 OUT	2 IN / 3 OUT	1 IN / 2 OUT
RS-232 SERIAL	•	•	•	•
ETHERNET	•	•	•	•
EXTERNAL BUTTON		•		•
POWER REQUIRED	24 VDC 0.5A	10 ... 30 VDC 1 ... 0.33 A	24 VDC 0.5 A	• T40 10 ... 30 VDC 1 ... 0.33 A • T47 10 ... 30 VDC 1.05 ... 0.35 A • T49 10 ... 30 VDC 1.2 ... 0.4 A
DIMENSIONS	140 x 68 x 24 mm (5.5 x 2.68 x 0.94 in)	123 x 60 x 86 mm (4.84 x 2.36 x 3.41 in)	• In-line: 138 x 63 x 45 mm (5.43 x 2.5 x 1.75 in) • Right-angle: 127 x 76 x 66 mm (5 x 3 x 2.54 in)	123 x 60 x 101 mm (4.84 x 2.36 x 3.98 in)
MECHANICAL PROTECTION	-	IP67	-	IP67
OPERATING TEMPERATURE	0 °C ... +50 °C	0 °C ... +45 °C	-5 °C ... +45 °C	0 °C ... +50 °C
HUMIDITY (NON-CONDENSING)	20 ... 80 %	0 ... 90 %	20 ... 80 %	0 ... 90 %
CERTIFICATIONS	CE, UL	CE, CSA	CE, UL	CE, CSA

## MX20



- Cost effective Embedded System
- Intel® T3100 dual-core 1.90 GHz processor
- Up to two 2 Mpix cameras connected
- Win XP® or Win 7® operating systems

The MX20 Series is an entry-level, affordable processor. This rugged, compact model features an Intel® T3100 dual-core 1.90 GHz processor and two independent PoE (Power over Ethernet) camera ports. The MX20 is easy to deploy, supporting up to two 2.0 Megapixel area scan cameras for a wide range of flexible, robust inspection tasks. The MX20 offers a cost-effective mean to migrate from smart-camera applications to an embedded vision system.

## MX40



- Mid performance Embedded System
- Intel® P8400 dual-core 2.26 GHz processor
- Up to four cameras connected
- Win XP® or Win 7® operating systems

The MX40 Series is a ruggedized and compact embedded vision processor that features Intel® multi-core processors and four independent PoE (Power over Ethernet) camera ports. The MX40's long-life embedded components provide a very robust and reliable vision system for critical inspection applications. The MX40 eliminates the need to purchase and install multiple cameras thus saving additional costs and reducing setup and networking time.

## MX80



- High performance Embedded System
- Intel® Core™ i7 quad-core processor
- Up to four cameras connected
- Win XP® or Win 7® operating systems

The next-generation MX80 Vision Processor extends the power and performance of MX-Series to faster applications, advanced algorithms and higher-resolutions. The MX80, with its Intel® Core™ i7 quad-core microprocessor, 4GB memory and four independent Gigabit PoE (Power over Ethernet) ports provides more image processing speed and power for up to four unique MX-Series camera inspections running parallel.

## EMBEDDED SYSTEMS



	MX20	MX40	MX80
CPU	Intel® T3100 dual-core 1.90 GHz	Intel® P8400 dual-core 2.26 GHz	Intel® Core i7-2710QE 4-core 2.10 GHz
SYSTEM MEMORY	4 GB DDR3 RAM	4 GB DDR3 RAM	4 GB DDR3 RAM
STORAGE	40 GB SSD	40 GB SSD	40 GB SSD
GRAPHICS	Intel® GM45/ICH9 video chipset (1600 x 1200 resolution), VGA	Intel® GM45/ICH9 video chipset (1600 x 1200 resolution), VGA	Intel® QM67 Express chipset (2048 x 1536 resolution), DVI
CAMERA INTERFACE	2-1000 Mbps Base-T, PoE camera ports (up to 7 W per channel)	4-1000 Mbps Base-T, PoE camera ports (up to 7 W per channel)	4-1000 Mbps Base-T, PoE camera ports (up to 7 W per channel)
CAMERA IMAGER LIMIT	2Mpixel or lower No LineScan support	None	None
NETWORK INTERFACE	2-10/100/1000 Mbps Base-T, LAN ports	2-10/100/1000 Mbps Base-T, LAN ports	2-10/100/1000 Mbps Base-T, LAN ports
SERIAL COMMUNICATIONS	2-RS-232 serial ports	2-RS-232 serial ports	5-RS-232 serial ports
USB	3-USB 2.0 ports	3-USB 2.0 ports	4-USB 2.0 ports 2-USB 3.0 ports
KEYBOARD/MOUSE	Combined PS/2 type mini-DIN connectors	Combined PS/2 type mini-DIN connectors	Combined PS/2 type mini-DIN connectors
COMM CONNECTIVITY	Supports Ethernet/IP, Modbus TCP and OPC	Supports Ethernet/IP, Modbus TCP and OPC	Supports Ethernet/IP, Modbus TCP and OPC
I/O	16 isolated digital inputs 16 isolated digital outputs 2 event inputs (shared with the Polled Inputs)	16 isolated digital inputs 16 isolated digital outputs 2 event inputs (shared with the Polled Inputs)	16 isolated digital inputs 16 isolated digital outputs 2 event inputs (shared with the Polled Inputs)
OPERATING SYSTEM	Windows XP Pro 32-Bit Windows 7 Pro 64-Bit	Windows XP Pro 32-Bit Windows 7 Pro 64-Bit	Windows XP Pro 32-Bit Windows 7 Pro 64-Bit
POWER REQUIREMENTS	24 VDC (+/- 10%, 3.5 amp min)	24 VDC (+/- 10%, 3.5 amp min)	24 VDC (+/- 10%, 4.5 amp min)
DIMENSIONS	200 mm x 85 mm x 165 mm (7.8 in. x 3.3 in. x 6.5 in)	200 mm x 85 mm x 165 mm (7.8 in. x 3.3 in. x 6.5 in)	230 mm x 82 mm x 206 mm (9.06 in. x 3.23 in. x 8.11 in)
OPERATING TEMPERATURE	0 to 55° C (+32 to +131° F)	0 to 55° C (+32 to +131° F)	0 to 55° C (+32 to +131° F)
HUMIDITY	0 to 90% (non-condensing)	0 to 90% (non-condensing)	0 to 90% (non-condensing)
CERTIFICATIONS (SAFETY COMPLIANCE)	CE/FCC, RoHS and UL in process	CE/FCC, RoHS, UL	CE/FCC, RoHS and UL in process






# DIGITAL CAMERAS

## MX-SERIES CAMERAS


MX-Series cameras enable fast integration of challenging machine vision solutions. The unique ability to mix and match color, gray-scale and line scan cameras with an MX-Series processor lets the user define, select and deploy a solution for high-speed, multi-camera machine vision inspections.

### MX-SERIES Gig-E CAMERAS

	GRAY-SCALE MODEL	COLOR MODEL	RIGHT ANGLE	RESOLUTION	IMAGER	FRAME RATE (FPS)	DIMENSIONS*
	M100	M100C		640 x 480	1/4" CCD	100	29 x 29 x 60.3 mm (1.14 x 1.14 x 2.37 in)
	M110	M110C		640 x 480	1/3" CCD	90	
	M115	M115C		659 x 494	1/2" CCD	100	
	M125	M125C		782 x 582	1/2" CCD	75	
	M150	M150C		1296 x 966	1/3" CCD	30	
	M180	M180C		1628 x 1236	1/1.8" CCD	20	
	M190	M190C		2048 x 1088	2/3" CMOS	50	
	M195	M195C		2048 x 2048	1"	25	
	M200	M200C	•	659 x 494	1/3" CCD	70	44 x 29 x 85.5 mm (1.73 x 1.14 x 3.37 in)
	M202	M202C	•	659 x 494	1/2" CCD	79	
	M205	M205C	•	752 x 480	1/3" CMOS	64	
	M210	M210C	•	782 x 582	1/2" CCD	55	
	M230	M230C	•	1034 x 779	1/3" CCD	31	
	M250	M250C	•	1280 x 960	1/3" CCD	32	
	M270	M270C	•	1392 x 1040	2/3" CCD	30	
	M290	M290C	•	1628 x 1236	1/1.8" CCD	14	
	M295	M295C	•	1628 x 1236	1/1.8" CCD	28	44 x 29 x 98.5 mm (1.73 x 1.14 x 3.88 in)
	M300	M300C	•	648 x 488	1/3" CCD	210	
	M330	M330C	•	1004 x 1004	2/3" CCD	60	
	M350	M350C	•	1608 x 1208	1" CCD	35	
	M390	M390C	•	2448 x 2050	2/3" CCD	17	

\*in-line models

### MX-SERIES LINE-SCAN Gig-E CAMERAS

	MODEL	RESOLUTION	MAX. LINE RATE	IMAGER SIZE	C-MOUNT	F-MOUNT
	M510	1024	18.7 KHz	10.24 mm	•	•
	M520	1024	35.7 KHz	10.24 mm	•	•
	M530	1024	56.1 KHz	10.24 mm	•	•
	M540	2048	9.7 KHz	20.48 mm	•	•
	M550	2048	18.7 KHz	20.48 mm	•	•
	M560	2048	29.2 KHz	20.48 mm	•	•

## MX-SERIES SPECIALTY CAMERAS

MX-Series specialty cameras support today's complex vision requirements that call for high-speed, high-quality inspections and measurements. These GigE Vision-compliant models represent the industry's latest advances in camera technologies, powered by Impact Software and supported globally by exceptional engineering expertise and customer service.


### MX-SERIES SPECIALTY Gig-E CAMERAS

MODEL	RESOLUTION	IMAGER	MONOCHROME COLOR	ACQUISITION RATE	LENS MOUNT
JAI					
Remote Head	656 x 494	1/3" CCD	Monochrome	120 fps	C-Mount
UV Sensitive	1380 x 1040	1/2" CCD	Monochrome	16 fps	C-Mount
8 MegaPixel	3296 x 2472	4/3" CCD	Monochrome	10 fps	F-Mount
16 MegaPixel	4872 x 3248	43.3mm CCD	Monochrome	3 fps	F-Mount
3 CCD Color	1392 x 1040	1/2" CCD	Color	20 fps	C-Mount
3 CCD Color	1620 x 1236	1/1.8" CCD	Color	15 fps	C-Mount
BASLER					
Aviator	1K x 1K	1/2" CCD	Monochrome - Color	100 fps	C-Mount
Aviator	1600 x 1200	2/3" CCD	Monochrome - Color	50 fps	C-Mount
Aviator	1920 x 1080	2/3" CCD	Monochrome - Color	50 fps	C-Mount
Aviator	2330 x 1750	1" CCD	Monochrome - Color	25 fps	C-Mount
SVS-VISTEK					
IP67	640 x 480	1/3" CCD	Monochrome - Color	124 fps	C-Mount
IP67	640 x 480	1/2" CCD	Monochrome - Color	125 fps	C-Mount
IP67	640 x 480	1/4" CCD	Monochrome - Color	150 fps	C-Mount
IP67	780 x 580	1/2" CCD	Monochrome - Color	86 fps	C-Mount
IP67	1024 x 768	1/3" CCD	Monochrome - Color	47 fps	C-Mount
IP67	1280 x 960	1/3" CCD	Monochrome - Color	30 fps	C-Mount
IP67	1360 x 1024	1/2" CCD	Monochrome - Color	25 fps	C-Mount
IP67	1360 x 1024	2/3" CCD	Monochrome - Color	34 fps	C-Mount
IP67	1600 x 1200	1/1.8" CCD	Monochrome - Color	26 fps	C-Mount
IP67	2448 x 2050	2/3" CCD	Monochrome - Color	10 fps	C-Mount
TELEDYNE DALSA					
Linescan	1K	Linear Imager	Monochrome	36 KHz	C-Mount F-Mount
Linescan	1K	Linear Imager	Monochrome	68 KHz	C-Mount F-Mount
Linescan	2K	Linear Imager	Monochrome	18 KHz	C-Mount F-Mount
Linescan	2K	Linear Imager	Monochrome	36 KHz	C-Mount F-Mount
Linescan	4K	Linear Imager	Monochrome	18 KHz	F-Mount


# ACCESSORIES



**OPTICS and FILTERS**

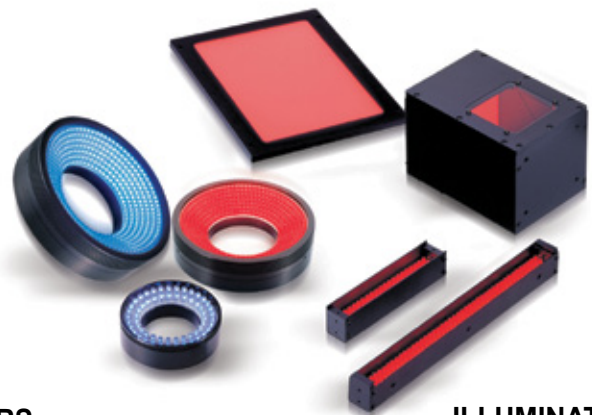

**ILLUMINATORS**

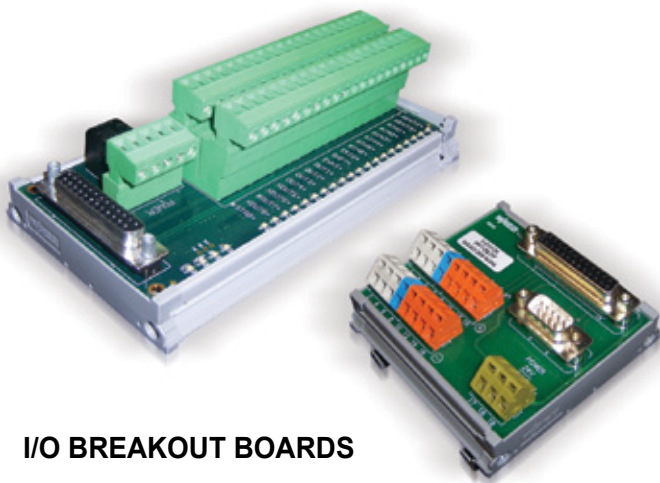

**I/O BREAKOUT BOARDS**



**OTHER ACCESSORIES**

Datalogic Automation is able to provide a broad and comprehensive range of accessories to allow customers and partners to fully leverage the power and capabilities of its machine vision systems. A wide and complete portfolio of lenses, filters, illuminators, enclosures, breakout boards, etc... either designed and manufactured internally or coming from selected leading machine vision suppliers.

## OPTICS and FILTERS

- Standard, flat field and telecentric lenses available in C-Mount and F-Mount formats
- Lens filters

## I/O BREAKOUT BOARDS

- Standard I/O boards
- Expansion I/O boards
- Connectivity to industrial fieldbus

## ILLUMINATORS

- Different technologies such as LED, fluorescent, xenon, halogen, laser, etc...
- Different colors, formats and shapes
- Backlighting, bright-field and dark-field illuminators

## OTHER ACCESSORIES

- Camera enclosures
- Industrial monitors
- Cables
- Mounting hardware



## [www.datalogic.com](http://www.datalogic.com)

- FREE full-feature trial software
- FREE download product literature, technical specifications and drawings
- FREE online training material to do at your own pace
- FREE IMPACT application videos and sample programs
- FREE MV initial application evaluation



### BASIC - 1.5 DAYS

- What is machine vision
- Vision products overview
- Application examples and proven solutions
- DataVS training
- I/O wiring of the hardware - basics
- VPM basic training

### INTERMEDIATE - 2 DAYS

- VPM intermediate training
- CPM basic training.
- Application Specific training – attendees are requested to bring their parts to work on them

### ON-SITE TRAINING

- Customized for Your Application, Location and Schedule
- Contact our Training Department for pricing

### SUPPORT

- Phone support Mon to Fri, 8 to 5
- Email support – contact Datalogic Automation Application Engineering dept. at [mvsupport@datalogic.com](mailto:mvsupport@datalogic.com)
- Complete Turn-key solutions with:
  - a. In-depth application evaluations
  - b. VPM and CPM programming
  - c. On-site installations

This image shows a full page of white paper with horizontal dotted lines. The lines are evenly spaced and run across the width of the page, providing a guide for handwriting practice. There are no margins, text, or other markings on the page.





## EUROPE

### DATALOGIC AUTOMATION

#### Headquarters

Via Lavino, 265  
40050 Monte San Pietro  
Bologna - Italy  
Tel. +39 051/6765611  
Fax +39 051/6759324  
info.automation.it@datalogic.com

### DATALOGIC AUTOMATION Iberia Sucursal en España

C/ Samontà, 21 Planta baja, Local 0  
08970 Sant Joan Despí  
Barcelona - Spain  
Tel. +34 (0)93/4772059  
Fax +34 (0)93/4777272  
info.automation.es@datalogic.com

### DATALOGIC AUTOMATION AB

Höjrodergatan 21  
21239 Malmö - Sweden  
Tel. +46 (0)40/385000  
Fax +46 (0)40/385001  
info.automation.se@datalogic.com

### DATALOGIC AUTOMATION Benelux

Newtonweg 3  
4104 BK Culemborg - The Netherlands  
Tel. +31 345/589489  
Fax +31 345/511419  
info.automation.nl@datalogic.com

### DATALOGIC AUTOMATION S.r.l.

#### Niederlassung Central Europe

Carl-Zeiss Str. 31  
73230 Kirchheim/Teck  
Germany  
Tel. +49 07021/509700  
Fax +49 07021/5097029  
info.automation.de@datalogic.com

### DATALOGIC AUTOMATION UK

Datalogic House  
Dunstable Road, Redbourn  
Hertfordshire  
England  
AL3 7PR  
Tel. +44 (0) 1582 791750  
Fax +44 (0) 1582 791769  
info.automation.uk@datalogic.com

### DATALOGIC AUTOMATION S.r.l.

#### Succursale en France

Le Parc Technologique de Lyon  
333 cours du 3ème Millénaire - Le Pôle  
69800 Saint Priest - France  
Tél. +33 (0)4/72476180  
Fax +33 (0)4/72470721  
info.automation.fr@datalogic.com

## AMERICA

### DATALOGIC AUTOMATION Inc

511 School House Road  
Telford, PA 18969-1196 - United States  
Tel. +1-800-BAR-CODE or +1-215-723-0981  
Fax +1-215-721-5551  
info.automation.us@datalogic.com

### DATALOGIC AUTOMATION Inc

#### Machine Vision

6301 Old Shakopee Road  
Minneapolis, MN 55438 - United States  
Tel. +1-952-996-9500  
Fax +1-952-996-9501  
info.vision.ia@datalogic.com

## ASIA

### DATALOGIC AUTOMATION Asia Ltd

Floor 20, Room 2017, Building 2,  
16 West Nan San Huan Road,  
Fengtai District, Beijing, China  
Tel: +86 (0)21-5836 6692  
Fax: +86 (0)21-5836 6695  
info.automation.cn@datalogic.com

### DATALOGIC AUTOMATION Asia Ltd

1108B, Blocks 5, Huayangnian Meinian Plaza,  
West Nanhai Road, Nanshan District,  
Shenzhen, China  
Tel: +86 (0)755-8629 6779  
Fax: +86 (0)755-8628 1280  
info.automation.cn@datalogic.com

### DATALOGIC AUTOMATION Asia Ltd

Suite 1301, Hua Rong Plaza,  
1289 South Pudong Road, Pudong District,  
Shanghai 200120 - China  
Tel: +86 (0)21-5836 6692  
Fax: +86 (0)21-5836 6695  
info.automation.cn@datalogic.com

### DATALOGIC AUTOMATION Asia Ltd

Unit 1-3, 7/F, Yuen Long Trading Centre,  
33 Wang Yip Street West, Yuen Long, NT.  
Hong Kong  
Tel +852 2785/3912  
Fax +852 2785/3913  
info.automation.hk@datalogic.com

### IDEC DATALOGIC.CO. Ltd

10-40, Mikuni-Honmachi 1-Chome,  
Yodogawa-ku, Osaka 532 0005, Japan  
Tel. +81(6) 6398/3200  
Fax +81 (6) 6398/3202  
www.idljp.com

## AUSTRALIA - NEW ZEALAND

### DATALOGIC AUTOMATION Pty Ltd

Unit 130, 45 Gilby Road  
Mt Waverley  
Victoria, 3149 - Australia  
Tel. +61 (0)3/95589299  
Fax: +61 (0)3/95589233  
info.automation.au@datalogic.com

[www.datalogic.com](http://www.datalogic.com)

Product and Company names and logos referenced may be either trademarks or registered trademarks of their respective companies. We reserve the right to make modifications and improvements.

 **DATALOGIC**

Rev. 01, 02/2013



9C512100U

